

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER

209313US3PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/868040

INTERNATIONAL APPLICATION NO.

PCT/JP99/02367

INTERNATIONAL FILING DATE

6 May 1999

PRIORITY DATE CLAIMED

28 December 1998 (Earliest)

TITLE OF INVENTION

MOLDED ARTICLE

APPLICANT(S) FOR DO/EO/US

Kenichi OTANI, et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
- ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

## Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

PCT/IB/304

Notice of Priority

PCT/IB/308

Amended Sheets (Pages 2, 39 and 40)

Drawings (14 Sheets)

Request for Consideration of Documents Cited in International Search Report

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/868040

PCT/JP99/02367

209313US3PCT

24. The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).

☐ 20 ☒ 30

\$130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	24 - 20 =	4	x \$18.00	\$72.00
Independent claims	4 - 3 =	1	x \$80.00	\$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>	\$0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$1,142.00

☒ Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

\$0.00

**SUBTOTAL =**

\$1,142.00

Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)).

☐ 20 ☐ 30 +

\$0.00

**TOTAL NATIONAL FEE =**

\$1,142.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐

\$0.00

**TOTAL FEES ENCLOSED =**

\$1,142.00

Amount to be:

refunded

\$

charged

\$

- ☒ A check in the amount of \$1,142.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Telephone: (703)413-3000  
Fax: (703)413-2220

**22850**

Surinder Sachar  
Registration No. 34,423

SIGNATURE

C. Irvin McClelland

NAME

21,124

REGISTRATION NUMBER

DATE

6-14-01

209313US

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF :  
OTANI KENICHI ET AL : ATTN: APPLICATION DIVISION  
SERIAL NO: NEW U.S. APPLICATION :  
(Based on PCT/JP99/02367)  
FILED: HEREWITH :  
FOR: MOLDED ARTICLE :

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified application as follows:

IN THE SPECIFICATION

Page 16, please replace the paragraph at prenumbered lines 6-8, with the following new paragraph:

In detail, the lid 18 is made separately from the molded article 10. It is fixed to the molded article 10 via the linking part 31' having the hinge 31 which is provided on the lid 18. The structure of the lid 18 is the same as in the second embodiment.

Page 17, please replace the paragraph at prenumbered lines 6-8, with the following new paragraph:

The molded article 10 can be produced by the same method as shown in Fig. 4 for the first embodiment. The lid 18 can be produced through almost the same steps as for the molded article 10.

Page 25, please replace the paragraph at prenumbered lines 27-29, with the following new paragraph:

The thick-walled portion 87 in the molded article 10 of the present embodiment can project both inward and outward. If desired, the part of the thick-walled portion projecting outward can serve as, for example, a projection for fitting a cap on.

Page 26, please replace the paragraph at prenumbered lines 1-11, with the following new paragraph:

A molded article 10 of the eighth embodiment which is shown in Fig. 23 has a thin plastic layer on its outer surface 104 and inner surface 105. Such plastic layers not only give the molded article 10 further increased strength but effectively prevent leaks of the contents. Because the outer surface 104 and the inner surface 105 of the molded article 10 are smooth, the plastic layers can be satisfactorily adhered to the outer surface 104 and the inner surface 105. While the thickness of each plastic layer is selected appropriately according to the wall thickness of the molded article 10, the kind of the contents and the like, it is usually 5 to 300  $\mu\text{m}$ , particularly 10 to 200  $\mu\text{m}$ , especially 20 to 100  $\mu\text{m}$ . The two plastic layers may be the same or different in thickness. The materials constituting each plastic layer include various thermoplastic synthetic resins such as polyethylene and polypropylene, emulsion latices such as an acrylic emulsion, and waxes such as a hydrocarbon wax.

Page 27, please replace the paragraph at prenumbered lines 16-21, with the following new paragraph:

The inner surface of a molded article 10 can be laminated with a plastic film by use of the vacuum chambers 130 and 140 as follows. As shown in Fig. 24(a), a molded article 10 is placed in the first vacuum chamber 130 with its opening portion 11 up. The depth of the first vacuum chamber 130 is virtually the same as the height of the molded article 10 so that the upper opening edge of the placed molded article 10 and that of the first vacuum chamber 130 are almost even.

#### IN THE CLAIMS

Please cancel Claims 1-10 without prejudice.

Please add new Claims 11-34 as follows:

11. (New) A molded article made predominantly of pulp and comprising a bottom portion and a body portion, wherein an angle between an outer surface of a side wall of said body portion and a ground contact plane of said bottom portion is  $85^{\circ}$  or greater, said molded article is seamless, a height of said body portion is 50 mm or more, and said molded article has corners whose thickness T2 is greater than a thickness T1 of other portions.

12. (New) A molded article made predominantly of pulp and comprising a bottom portion and a body portion, wherein an angle between an outer surface of a side wall of said body portion and a ground contact plane of said bottom portion is  $85^{\circ}$  or greater, said molded article is seamless, a height of said body portion is 50 mm or more, and said molded article has corners whose density  $\rho_2$  is smaller than a density  $\rho_1$  of other portions.

13. (New) A molded article made predominantly of pulp and comprising a bottom portion, a body portion and an opening portion, wherein said body portion has a depression or a projection, or said opening portion has an extension extending inward from a peripheral edge thereof, said depression or said projection is continuous only in a horizontal or oblique direction provided that said depression or said projection is continuous in a straight line, said body portion is seamless, and said molded article has corners whose thickness T2 is greater than a thickness T1 of other portions.

14. (New) A molded article made predominantly of pulp and comprising a bottom portion, a body portion and an opening portion, wherein said body portion has a depression or a projection, or said opening portion has an extension extending inward from a peripheral edge thereof, said depression or said projection is continuous only in a horizontal or oblique direction provided that said depression or said projection is continuous in a straight line, said body portion is seamless, and said molded article has corners whose density  $\rho_2$  is smaller than a density  $\rho_1$  of other portions.

15. (New) The molded article according to claim 11, wherein T1 is 0.1 mm or more, and T2/T1 is 1.5 to 2.

16. (New) The molded article according to claim 12, wherein T1 is 0.1 mm or more, and T2/T1 is 1.5 to 2.

17. (New) The molded article according to claim 12, wherein  $\rho_1$  and  $\rho_2$  satisfy a relationship  $0.1 \times \rho_1 < \rho_2 < \rho_1$ .

18. (New) The molded article according to claim 14, wherein  $\rho_1$  and  $\rho_2$  satisfy a relationship  $0.1 \times \rho_1 < \rho_2 < \rho_1$ .

19. (New) The molded article according to claim 11, further comprising a lid for opening and closing said opening portion of said molded article and/or a measuring container, said lid and/or said measuring container being linked with said molded article by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

20. (New) The molded article according to claim 12, further comprising a lid for opening and closing said opening portion of said molded article and/or a measuring container, said lid and/or said measuring container being linked with said molded article by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

21. (New) The molded article according to claim 13, further comprising a lid for opening and closing said opening portion of said molded article and/or a measuring container, said lid and/or said measuring container being linked with said molded article by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

22. (New) The molded article according to claim 14, further comprising a lid for opening and closing said opening portion of said molded article and/or a measuring container, said lid and/or said measuring container being linked with said molded article by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

23. (New) The molded article according to claim 11, further comprising a lid for opening and closing said opening portion of said molded article, said lid being a part prepared separately from said molded article and fixed to said molded article by a linking part having a hinge, said linking part being provided on said lid.

24. (New) The molded article according to claim 12, further comprising a lid for opening and closing said opening portion of said molded article, said lid being a part prepared

separately from said molded article and fixed to said molded article by a linking part having a hinge, said linking part being provided on said lid.

25. (New) The molded article according to claim 13, further comprising a lid for opening and closing said opening portion of said molded article, said lid being a part prepared separately from said molded article and fixed to said molded article by a linking part having a hinge, said linking part being provided on said lid.

26. (New) The molded article according to claim 14, further comprising a lid for opening and closing said opening portion of said molded article, said lid being a part prepared separately from said molded article and fixed to said molded article by a linking part having a hinge, said linking part being provided on said lid.

27. (New) The molded article according to claim 11, further comprising a plastic layer formed on the outer and/or the inner surfaces of said molded article by vacuum forming or pressure forming, and said plastic layer is obtainable by laminating a plastic film on said molded article while said molded article is heated to a predetermined temperature.

28. (New) The molded article according to claim 12, further comprising a plastic layer formed on the outer and/or the inner surfaces of said molded article by vacuum forming or pressure forming, and said plastic layer is obtainable by laminating a plastic film on said molded article while said molded article is heated to a predetermined temperature.

29. (New) The molded article according to claim 13, further comprising a plastic layer formed on the outer and/or the inner surfaces of said molded article by vacuum forming or pressure forming, and said plastic layer is obtainable by laminating a plastic film on said molded article while said molded article is heated to a predetermined temperature.



30. (New) The molded article according to claim 14, further comprising a plastic layer formed on the outer and/or the inner surfaces of said molded article by vacuum forming or pressure forming, and said plastic layer is obtainable by laminating a plastic film on said molded article while said molded article is heated to a predetermined temperature.

31. (New) The molded article according to claim 27, wherein said plastic film is preliminarily stretched prior to lamination.

32. (New) The molded article according to claim 28, wherein said plastic film is preliminarily stretched prior to lamination.

33. (New) The molded article according to claim 29, wherein said plastic film is preliminarily stretched prior to lamination.

34. (New) The molded article according to claim 30, wherein said plastic film is preliminarily stretched prior to lamination.

#### REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

The present Preliminary Amendment is submitted to place the above-identified application in more proper format under United States practice.


By the present Preliminary Amendment the specification has been amended to correct for minor informalities. The changes made to the specification are deemed to be self-evident from the original disclosure, and thus are not deemed to raise any issues of new matter.

Original Claims 1-10 have been canceled and new Claims 11-34 are presented for examination. New Claims 11-34 are deemed to be self-evident from the original disclosure, including original Claims 1-10, and thus are not deemed to raise any issues of new matter.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Gregory J. Maier  
Attorney of Record  
Registration No. 25,599  
Surinder Sachar  
Registration No. 34,423



**22850**

(703) 413-3000  
Fax No.: (703) 413-2220  
GJM/SNS:sjh

**Marked-Up Copy**

Serial No:

Amendment Filed on:

IN THE SPECIFICATION

Page 16, please replace the paragraph at prenumbered lines 6-8, with the following new paragraph:

--In detail, the lid 18 is made separately from the molded article 10. It is fixed to the [main body 2 of the container] molded article 10 via the linking part 31' having the hinge 31 which is provided on the lid 18. The structure of the lid 18 is the same as in the second embodiment.--

Page 17, please replace the paragraph at prenumbered lines 6-8, with the following new paragraph:

--The molded article 10 can be produced by the same method as shown in Fig. 4 for the first embodiment. The lid 18 can be produced through almost the same steps as for the [main body of the container 2] molded article 10--

Page 25, please replace the paragraph at prenumbered lines 27-29, with the following new paragraph:

The thick-walled portion [86] 87 in the molded article 10 of the present embodiment can project both inward and outward. If desired, the part of the thick-walled portion projecting outward can serve as, for example, a projection for fitting a cap on.

Page 26, please replace the paragraph at prenumbered lines 1-11, with the following new paragraph:

--A molded article 10 of the eighth embodiment which is shown in Fig. 23 has a thin plastic layer on its outer surface 104 and inner surface 105. Such plastic layers not only give the molded article 10 further increased strength but effectively prevent leaks of the contents. Because the outer surface 104 and the inner surface 105 of the molded article 10 are smooth, the plastic layers can be satisfactorily adhered to the outer surface 104 and the inner surface 105. While the thickness of each plastic layer is selected appropriately according to the wall thickness of the molded article [1] 10, the kind of the contents and the like, it is usually 5 to 300  $\mu\text{m}$ , particularly 10 to 200  $\mu\text{m}$ , especially 20 to 100  $\mu\text{m}$ . The two plastic layers may be the same or different in thickness. The materials constituting each plastic layer include various thermoplastic synthetic resins such as polyethylene and polypropylene, emulsion latices such as an acrylic emulsion, and waxes such as a hydrocarbon wax.--

Page 27, please replace the paragraph at prenumbered lines 16-21, with the following new paragraph:

--The inner surface of a [hollow container 1] molded article 10 can be laminated with a plastic film by use of the vacuum chambers 130 and 140 as follows. As shown in Fig. 24(a), a molded article 10 is placed in the first vacuum chamber 130 with its opening portion 11 up. The depth of the first vacuum chamber 130 is virtually the same as the height of the molded article 10 so that the upper opening edge of the placed molded article 10 and that of the first vacuum chamber 130 are almost even.--

IN THE CLAIMS

--1-10. (Canceled).

11-34. (New).--

09868040.072301

14 PRAS

09/868040  
JCO3 Rec'd PST/PTG 14 JUN 2001

## DESCRIPTION

### MOLDED ARTICLE

#### Technical Field:

The present invention relates to a molded article comprising pulp as a major component.

#### Background Art:

Plastics are used as common materials of hollow containers, such as containers with a lid and bottles, for their excellent molding properties and productivity. However, because plastic hollow containers involve various problems associated with waste disposal, hollow containers made of pulp are conceivable substitutes for plastic containers. Pulp-made hollow containers are not only easy to dispose of but economical because they can be manufactured from used paper.

Known techniques pertaining to pulp-made hollow containers include the technique disclosed in Japanese Patent Laid-Open No. 5-279998. The container disclosed has an angle of 45° or more at which the side walls rise and a depth of 15 mm or more. Because this container is produced by pressing a pulp layer deposited on a papermaking net with a pressing mold and then hot pressed in a metal mold, it is virtually impossible to make the side walls stand at an angle approximately 90° or more and to make the bottom deeper.

A bottle having an annular rib-like projection on its periphery is also known as another technique relating to pulp molded containers. Since the bottle is made by separately forming a pulp layer on each of a pair of splits and then closing the splits to join the two pulp layers, it unavoidably has seams at the joint. Such seams reduce the bottle strength and also impair the appearance.

Accordingly, an object of the present invention is to provide a molded article made mainly of pulp the side walls of which have a large angle to the ground and which has a large depth.

09/868040

JC03 Rec'd PCT/PTC

14 JUN 2001

2

Another object of the present invention is to provide a molded article made mainly of pulp which involves no reduction in bottle strength, has a satisfactory appearance, and has a depression or a projection of prescribed shape around the opening or the body thereof.

#### Disclosure of the Invention:

The present invention achieves the above object by providing a molded article made predominantly of pulp and comprising a bottom portion and a body portion, wherein the angle between the outer surface of a side wall of said body portion and the ground contact plane of said bottom portion is 85° or greater, the height of said body portion is 50 mm or more, and said molded article has corners whose thickness is greater than the thickness of other portions (hereinafter referred to as a first aspect).

The present invention also achieves the above object by providing a molded article made predominantly of pulp and comprising a bottom portion, a body portion and an opening portion, wherein said body portion has a depression or a projection, or said opening portion has an extension extending inward from the peripheral edge thereof, said depression or said projection is continuous only in the horizontal or oblique direction provided that said depression or said projection is continuous in a straight line, said body portion is seamless, and said molded article has corners whose thickness is greater than the thickness of other portions (hereinafter referred to as a second aspect).

#### Brief Description of the Drawings:

Fig. 1 is a perspective view of an embodiment of the molded article according to the present invention.

Fig. 2 is a vertical cross-section of the molded article shown in Fig. 1.

Fig. 3 is a transverse cross-section of the body portion of the molded article shown in Fig. 1.

Figs. 4(a), 4(b), 4(c), and 4(d) show in sequence a papermaking step out of the steps for producing the molded article shown in Fig. 1.

Fig. 5 is a vertical cross-section of an embodiment of the molded article according to the second aspect (corresponding to Fig. 2).

Fig. 6 is a vertical cross-section of another embodiment of the molded article according to the second aspect (corresponding to Fig. 2).

Fig. 7 is a perspective of a second embodiment of the molded article according to the first aspect.

Fig. 8 is a side view of the molded article shown in Fig. 7.

Figs. 9(a) and 9(b) each show a cross-section of a preferred configuration of a first hinge and a second hinge.

Fig. 10 schematically shows a pulp slurry being injected into a mold which is preferably used in the production of the molded article shown in Fig. 7.

Fig. 11 is a perspective of a third embodiment of the molded article according to the first aspect.

Fig. 12 is a side view of the molded article shown in Fig. 11.

Fig. 13 schematically illustrates hinge formation in an embodiment of the method of producing the molded article shown in Fig. 11.

Fig. 14 is a perspective of a fourth embodiment of the molded article according to the first aspect.

Fig. 15 is a perspective of a fifth embodiment of the molded article according to the first aspect.

Fig. 16 is a cross-section of Fig. 15 taken along line A-A, showing a measuring container being fitted between fitting projections.

Fig. 17 is a perspective of a sixth embodiment of the molded article according to the first aspect.

Fig. 18 is an enlarged view of a fitting part for a handle.

Fig. 19 is a perspective of a seventh embodiment of the molded article according to the first aspect.

Fig. 20 is an exploded perspective of a mold which is preferably used in the production of the molded article according to the seventh embodiment.

Fig. 21 is a vertical cross-section of the mold shown in Fig. 20, taken along the parting face.

Figs. 22(a) and 22(b) show part of a papermaking step out of the steps for producing the molded article according to the embodiment shown in Fig. 19.

Fig. 23 is a vertical cross-section of an eighth embodiment of the molded article according to the first aspect.

Figs. 24(a), 24(b), 24(c), and 24(d) show in sequence the step of laminating the inner surface of a molded article with a plastic film.

Fig. 25 is a partial perspective of a molded article covered with a shrink film, with part cut away.

Figs. 26(a) and 26(b) show the step of covering the outer surface of a molded article with a shrink film.



Best Mode for Carrying out the Invention:

Preferred embodiments of the molded article according to the first aspect of the present invention will be illustrated with reference to the accompanying drawings.

Figs. 1 and 2 show a perspective and a vertical cross-section, respectively, of a molded article 10 according to the first embodiment of the first aspect. The molded article 10 is a hollow container suitable for holding such contents as powder or granules. It has an opening portion 11 in the upper part, a body portion 12, and a bottom portion 13.

The body portion 12 and the bottom portion 13 connect by a curved portion 12' to give the molded article 10 increased impact strength. The curvature of the curved portion 12' is preferably 0.5 mm or more, particularly 5 mm or more, especially 7 mm or more, from the standpoint of improvements on impact strength, drying efficiency, surface finish, and adhesion to a plastic film that is used in the eighth embodiment hereinafter described. The transverse cross-section of the molded article 10 is a rectangle with its four corners rounded to give the molded article 10 increased impact strength. The curvature of the four corners is preferably 0.5 mm or more, particularly 5 mm or more, especially 7 mm or more, for the same reasons as described as for the curved portion 12'. The four sides of the rectangle are gently curved outward. The body portion 12 has a continuous depression 14 around its circumference to make the molded article 10 easy to hold. The depression 14 will be described later in detail.

The front and rear walls making the body portion 12 form straight lines (except for the depression 14) in the height direction of the molded article 10 when seen from the side. Likewise the right and left walls making the body portion 12 form straight lines (except for the depression 14) in the height direction when the molded article 10 is seen from the front.

The bottom portion 13 is made up of a central depression 15 and a heel 16 continuously surrounding the central depression 15. The outer surface of the heel 16 is brought into contact with the ground. Such a configuration of the bottom portion 13 secures stability of the molded article 10 when placed on its bottom.

The molded article 10 has smooth outer and inner surfaces. In case where a plastic layer or a coating layer is formed on the outer and/or the inner surfaces as hereinafter

described, the surface smoothness will secure satisfactory adhesion to the layer. Further, the surface smoothness would facilitate neat printing on the outer surface and also provides a better outer appearance. The terminology "smooth" as used herein means that the surface profile of the outer and inner surfaces of the molded article is such that the center-line average roughness (Ra, JIS B0601) is 50  $\mu\text{m}$  or less, and the maximum height ( $R_{\text{max}}$ , JIS B0601) is 500  $\mu\text{m}$  or less.

As shown in Fig. 2, the molded article 10 has every side wall (front, rear, right, and left) of the body portion 12 standing with its outer surface making an angle  $\theta$  exceeding  $85^\circ$ , preferably  $89^\circ$  or more, to the ground contact plane B of the bottom portion 13 (the angle  $\theta$  in Fig. 2 is approximately  $90^\circ$ ) and a height h (see Fig. 2) of 50 mm or more, preferably 100 mm or more. The angle  $\theta$  can exceed  $90^\circ$ . It is virtually impossible for the container disclosed in Japanese Patent Laid-Open No. 5-279998 *supra*, being subject to various designing restrictions, to have its side walls standing at such a large angle and to have such a deep bottom. The present invention gets rid of such inconveniences. The outer surface of the side wall, from which the angle  $\theta$  is measured, is the part that forms a straight line in the molded article's height direction when viewed from the front or the side of the molded article 10. Accordingly, the outer surface of the depression 14 formed on the body portion 12 is excluded from the object of measurement.

Unlike conventional hollow pulp molded articles, the molded articles 10 according to this embodiment has no seams nor thick-walled parts around the body portion 12 and between the body portion 12 and the bottom portion 13. Thus, the molded article has increased strength and a satisfactory appearance.

The molded article 10 comprising pulp as a major component. Of course it can be 100% pulp made. When other minor materials are used in addition to pulp, the proportion of the other materials is preferably 1 to 70% by weight, particularly 5 to 50% by weight. Useful other materials include inorganic substances such as talc and kaolinite, inorganic fibers such as glass fiber and carbon fiber, powder or fiber of synthetic resins such as polyolefin, nonwood or plant fibers, and polysaccharides.

The molded article 10 formed of the above-described raw materials preferably has a

density (i.e., the density of the wall of the container) of 0.4 to 2.0 g/cm<sup>3</sup> to have suitable rigidity as a hollow container, satisfying mechanical properties such as tensile strength, compressive strength, drop strength, and strength at the opening. Still preferably the density is 0.6 to 1.5 g/cm<sup>3</sup> to secure an excellent feel on use.

5 The molded article 10 which has a water vapor transmission rate of 100 g/(m<sup>2</sup>·24 hrs) or less, preferably 50 g/(m<sup>2</sup>·24 hrs) or less, as measured in accordance with JIS Z0208, absorbs little moisture in the air and thereby retains moderate rigidity as a hollow container. As a result, the contents are effectively protected against quality deterioration due to water absorption. That is, the contents are given improved storage stability.

10 It is preferred for the molded article 10 to have a surface tension of 10 dyn/cm or less and water repellency (JIS P8137) of R10. The molded article having such a surface tension and a water repellency can be obtained by molding a paper stock comprising the pulp slurry having incorporated therein additives, such as a waterproofing agent, a water repellent, etc.

15 The molded article 10 which has a tensile strength of 5 MPa or more, particularly 10 MPa or more, is preferred for inhibiting rupture due to shocks, etc. The term "tensile strength" as used herein means a breaking strength measured by the following procedure in accordance with JIS P8113. A 15 mm wide by 140 mm long specimen is cut out of an arbitrary portion of the molded article 10. The specimen is set on a tensile tester at a chuck distance of 100 mm. Then the specimen is pulled at a pulling speed of 20 mm/min. In case  
20 where the molded article cannot afford a specimen of the above size, the size of a specimen to be measured can be changed appropriately.

25 The molded article 10 which has a specific compressive strength of 100 Nm<sup>2</sup>/g or more, particularly 110 Nm<sup>2</sup>/g or more, is preferred, for it is hardly collapsed when stacked up on top of another. The term "specific compressive strength" as used herein is one measured in accordance with JIS P8126.

It is preferred for the molded article 10 to have such a drop strength that it does not break even when dropped 10 times in the drop test specified in JIS Z0217. The opening portion of the molded article 10 preferably exhibits such strength that the force required for

pressing the opening portion 11 from its side to give a deformation of 30 mm is 10 N or greater.

It is preferred for the molded article 10 to have a larger thickness at the corners in its vertical cross-section and/or transverse cross-section than the other portions to improve the compressive strength (buckling strength) of the molded article 10 as a whole over the one having equal thickness in every portion. For example, in the vertical cross-section of the molded article 10 shown in Fig. 2, it is preferred that the thickness T2 of the corners, i.e., curved portions 12', be greater than the thickness T1 of the body portion 12 (i.e.,  $T2 > T1$ ). In this case, where  $T2/T1$  is 1.5 to 2, the improvement on compressive strength of the whole molded article 10 is further secured. It is preferred that the thickness T1 be 0.1 mm or greater for the molded article 10 to exhibit the minimum compressive strength required. It is required for the molded article 10 to have a prescribed compressive strength, considering that the molded articles 10 are to be transported or stacked up in a warehouse or a shop. Likewise, it is preferred that the molded article 10 has a larger thickness at the corners (T2) than in the other portions (thickness T1) in its transverse cross-section at the body portion shown in Fig. 3.

Where the corners of the molded article 10 in the vertical cross-section and/or the transverse cross-section satisfy the relationship that their density  $\rho2$  is smaller than the density  $\rho1$  of the other portions (i.e.,  $\rho1 > \rho2$ ) as well as the above-described relationship between T1 and T2, there is produced an effect that two conflicting phenomena - an improvement in compressive strength of the molded article 10 and a reduction in amount of the material used - can result. This effect is more notable when  $0.1 \times \rho1 < \rho2 < \rho1$ . The molded article 10 which satisfies these relationships has a compressive strength of 190 N or greater. The compressive strength as referred to here is the maximum strength in compressing the molded article 10 in the direction of height at a speed of 20 mm/min. The above-described relationships between T1 and T2 and between  $\rho1$  and  $\rho2$  can be established by, for instance, properly selecting conditions in carrying out a preferred method for producing the molded article 10 which will be described later, such as the pressure or flow rate of a pressurizing fluid used in pressing with a pressing member 6, the material or shape of the pressing member 6, the shape of the molded article, and the like.

For example, molded articles 10 which were produced so as to have the T1, T2,  $\rho1$ ,

and  $\rho_2$  shown in Table 1 below in their transverse cross-section of the body portion (see Fig. 3) had the compressive strength shown in Table 1. It is seen that the compressive strength increases as the  $T_2/T_1$  value increases and as the  $\rho_2/\rho_1$  value decreases. Moreover, the example 2 having a higher compressive strength is lighter. The values  $T_1$ ,  $T_2$ ,  $\rho_1$ , and  $\rho_2$  given in Table 1 are the respective averages of values measured on four positions of the body portion in the height direction.

TABLE 1

	$T_1$ (mm)	$T_2$ (mm)	$T_2/T_1$	$\rho_2/\rho_1$	Compressive Strength (N)	Weight (g)
Example 1	0.550	0.593	1.078	0.928	441	13.4
Example 2	0.595	0.835	1.403	0.713	500	13.0

A preferred method for producing the molded article of the present embodiment will be described with reference to Fig. 4. The molded article 10 of the present embodiment is produced by pulp molding, particularly conveniently by depositing pulp on the inner wall of a cavity formed in a mold. The papermaking step of the steps for producing the molded article 10 by this method is illustrated in sequence in Figs. 4(a) through (d), in which (a) is the step of papermaking, (b) is the step of inserting a pressing member, (c) is the step of pressing and dewatering, and (d) is the step of opening a split mold to remove a pulp deposited body.

As shown in Fig. 4(a), a pulp slurry is poured into a mold having a cavity 1. The cavity 1, formed by joining a pair of splits 3 and 4, has a configuration in conformity to the outer contour of a molded article 10 to be molded. Each of the splits 3 and 4 has a plurality of interconnecting holes 2 which connect the outer side thereof and the cavity 1. The inner surface of the splits 3 and 4 is covered with a net (not shown) of prescribed mesh.

The cavity 1 is evacuated from the outside of the splits 3 and 4 to suck water of the pulp slurry and to deposit the pulp fiber on the inner wall of the cavity 1. As a result, a pulp deposited body 5 is built up on the inner wall of the cavity 1.

On forming the pulp deposited body 5 of prescribed thickness, pulp slurry injection is stopped, and the cavity 1 is completely dewatered by sucking. Subsequently, as shown in

Fig. 4(b), a hollow, stretchable and elastic pressing member 6 is inserted into the cavity 1 while evacuating the cavity 1 as shown in Fig. 4(b). The pressing member 6 is to be inflated in the cavity 1 like a balloon to press the pulp deposited body 5 toward the inner wall of the cavity 1 to transfer the inner configuration of the cavity 1. Therefore, the pressing member 6 is made of urethane, fluorine rubber, silicone rubber, elastomers, etc., which are excellent in tensile strength, impact resilience, stretchability, and the like. The pressing member 6 can be a hollow bag.

As shown in Fig. 4(c), a pressurizing fluid is fed into the pressing member 6 to inflate it. The inflated pressing member 6 presses the pulp deposited body 5 to the inner wall of the cavity 1. While the pulp deposited body 5 is pressed onto the inner wall of the cavity 1 by the inflated pressing member 6, the configuration of the inner wall of the cavity 1 is transferred thereto, and dewatering further proceeds at the same time. Since the pulp deposited body 5 is pressed from the inside to the inner wall of the cavity 1 in this manner, the inner configuration of the cavity 1 can be transferred to the pulp deposited body 5 with good precision however complicated the configuration may be. Unlike the conventional production process, the resulting molded article has no seams nor thick-walled parts due to joining since the present process involves no step of joining. As a result, the resulting molded article has secured strength and a satisfactory appearance. The pressurizing fluid for inflating the pressing member 6 includes compressed air (heated air), oil (heated oil) and other liquids. The pressure for feeding the pressurizing fluid is preferably 0.01 to 5 MPa, particularly 0.1 to 3 MPa.

After the configuration of the inner wall of the cavity 1 is sufficiently transferred to the pulp deposited body 5, and the pulp deposited body 5 is dewatered to a prescribed water content, the pressurizing fluid is withdrawn from the pressing member 6, whereupon the pressing member 6 shrinks automatically to its original size as shown in Fig. 4(d). The shrunken pressing member 6 is taken out of the cavity 1, and the mold is opened to remove the wet pulp deposited body 5 having the prescribed water content.

The pulp deposited body 5 thus taken out is then subjected to the step of heat drying.

In the step of heat drying, the same operation as in the papermaking step shown in Fig. 4 is conducted, except that papermaking and dewatering are not carried out. That is, a mold, which is composed of a pair of splits joined together to form a cavity in conformity to the

outer contour of a desired molded article, is heated to a prescribed temperature, and the wet pulp deposited body is set in the mold.

A pressing member similar to the pressing member 6 used in the papermaking step is put into the pulp deposited body, and a pressurizing fluid is fed into the pressing member to inflate it, whereby the pulp deposited body is pressed onto the inner wall of the cavity by the inflated pressing member. The material of the pressing member and the pressure for feeding the pressurizing fluid can be the same as those used in the papermaking step. In this state, the pulp deposited body is dried by heat. After the pulp deposited body dries thoroughly, the pressurizing fluid is withdrawn from the pressing member, and the shrunken pressing member is taken out. The mold is opened to remove the molded article 10.

The molded article 10 thus produced has an angle exceeding  $85^{\circ}$  between the ground contact plane of the bottom 13 and the outer surface of the side wall of the body 12 and a body 12 height of 50 mm or more. Both the outer and the inner surfaces of the molded article 10 are smooth with no joint seams.

The second aspect of the present invention will be described with reference to Figs. 5 and 6. The description about the first aspect appropriately applies to the particulars that are not specifically explained here.

The molded article 10 of the second aspect shown in Fig. 5 has almost the same construction as the molded article of the first aspect shown in Figs 1 through 3. The body portion 12 has a continuous depression 14 around its circumference similarly to the first aspect. The molded article 10 shown in Fig. 6 has a projection 14' in place of the depression around the circumference of the body portion 12. Both the molded articles 10 shown in Figs. 5 and 6 have an extension 7 extending inwardly from the peripheral edge of the opening portion 11. The extension 7 serves to strengthen the opening portion 11. When the opening 11 is closed with seal, etc., the upper side of the extension 17 serves as a sealing surface. The depression 14, the projection 14', and the extension 17 are equivalent to what we call "undercuts" in the field of injection molding of plastics, and the terms "depression", "projection", and "extension" as used herein include any parts equivalent to what is called "undercuts". Accordingly, a depression or a projection formed continuously in a straight line

in the vertical direction of the molded article 10, being not equivalent to an undercut, is excluded from what is intended by the term "depression" or "projection" in the context of the present invention. In other words, where a depression or a projection is continuous linearly, it is continuous only in the horizontal direction or an oblique direction of the molded article

10. With conventional pulp molding methods, it has been impossible to make a container having the above-identified depression 14, projection 14' or extension 17 and yet having no seams of joints. Because the molded articles of the present invention are seamless notwithstanding the depression 14, the projection 14' and the extension 17, they are free from the problem of strength reduction and have a satisfactory appearance.

In an embodiment of the second aspect, a depression 14 and/or a projection 14' can be formed to provide the body portion 12 with three-dimensional letters, figures or symbols. Further, the extension 17 of the molded article 10, which is formed on the peripheral edge of the opening portion 11, can be discontinuous.

The second to eighth embodiments of the first aspect of the present invention are then described with reference to Figs. 7 through 26. Only the particulars different from the first embodiment will be explained. The description about the first embodiment appropriately applies to the particulars that are not specifically explained here. The members in Figs. 7 to 26 which are the same as those in Figs. 1 to 4 are given the same numerical references as used in Figs. 1 to 4. Unless otherwise noted, the second to eight embodiments of the first aspect shall apply to the second aspect.

As shown in Figs. 7 and 8, a molded article of the second embodiment has a lid which swings to open and shut the opening portion 11. The lid and/or a measuring container are connected to the molded article 10 by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

The lid 18, which is integrally molded with the molded article 10, links up with the molded article 10 near the opening portion 11 by the first hinge 31 so as to open and close the opening portion 11. The lid 18 consists of a flat top 32 and peripheral wall 33 standing upright from the peripheral edge of the top 32 so that the lower edge 33a of the peripheral wall 33 may be brought into, or out of, contact with the fitting part of the molded article 10.



The lid 18 and the molded article 10 link up between the lower edge 33a of the peripheral wall 33 of the former and the horizontal contact part 25 of the latter.

The measuring container 19 is also integrally molded with the molded article 18 similarly to the lid 18. The measuring container 19 links up with the molded article 10 by the second hinge 41. The measuring container 19 is a scoop composed of a cup 42, which is a closed-end rectangular cylinder, and a handle 43 integrally connected to the cup 42. The measuring container 19 connects up with the molded article 10 near the opening portion 11 by a linking part 44 having the second hinge 41. As shown in Fig. 8, the measuring container 19 swings on the second hinge 41 to be put inside the molded article 10 without projecting over the opening portion 11. This construction permits the opening portion 11 to be sealed with seal, etc.

The lid 18 and the measuring container 19 are integrally molded together with the molded article 10 and link up with the molded article 10 via the first hinge 31 and the second hinge 41, respectively. The first hinge 31 is a thin and dense part formed in a linking part between the lid 18 and the molded article 10. The second hinge 41 is a thin and dense part formed in a linking part between the measuring container 19 and the molded article 10.

More specifically, the linking part which links the lid 18 and the molded article 10 and the linking part which links the measuring container 19 and the molded article 10 each have a linear groove having a prescribed cross-section to make the first hinge 31 and the second hinge 41. The lid 18 swings in an arc on the first hinge 31 to open and shut the opening portion 11 of the molded article 10. The measuring container 19 similarly swings on the second hinge 41 to be put inside the molded article 10.

The first hinge 31 and the second hinge 41 are thinner than the other portions of the molded article 10, the lid 18 and the measuring container 19. The thickness T1 at the thinnest of the first and second hinges 31 and 41 (see Fig. 9) is preferably 0.05 mm or greater and from 5 to 100%, still preferably 15 to 80%, of the other portions of the molded article 10, the lid 18 and the measuring container 19 in order to obtain excellent flexing property and durability. While every part of the molded article 10, the lid 18, and the measuring container 19 can be of a thickness and a density except the first and second hinges, the preferred range

of the thickness T1 of the first and second hinges and a preferred range of the density of the first and second hinges (hereinafter described) are represented based on the thickness and density of the body portion 12 of the molded article 10 as a standard.

The first and second hinges 31 and 41 are denser than the other portions of the molded article 10, the lid 18 and the measuring container 19. For obtaining excellent flexing properties and durability, the density of the first and second hinges 31 and 41 is 1.05 to 20 times, preferably 2 to 20 times, particularly preferably 2 to 5 times, that of the other portions of the molded article 10, the lid 18 and the measuring container 19. From the same viewpoint, a preferred density of the hinges 31 and 41 is 0.4 to 2.0 g/cm<sup>3</sup>. The density of the hinge is a maximum density of the hinge, which is calculated from thickness and weight measurements per given area.

For obtaining excellent flexing properties and durability, it is preferred for the first and second hinges 31, 41 to have a tensile strength of 5 MPa or greater and a specific compressive strength of 100 N·m<sup>2</sup>/g or greater. From the same standpoint, the width of the first and second hinges 31, 41 (the width in the direction of linking the molded article 10 with the lid 18 or the measuring container 19) is preferably 0.2 mm or more, particularly 1 mm or more. The "width of the hinge" as referred to here is the smallest width of the groove on the side facing outward when the linking part is bent.

Two preferred configurations of the hinges 31 and 41 are shown in Fig. 9. The hinge of Fig. 9(a) is formed by making a groove on both the upper and the lower sides of the linking part between the molded article 10 and the lid 18 or the measuring container 19. The hinge of Fig. 9(b) is formed by making a groove on only the lower side of the linking part. The upper side in Fig. 9 corresponds to the side facing inward when the linking part is bent. The "width of the hinge" is, in Fig. 9(a), a width W1 of the lower side groove at the deepest; and, in Fig. 9(b), a width W3 of the groove at the deepest. The angular part in the grooves indicated by symbol "CorR" is preferably chamfered or rounded. Preferred dimensions of each part of the hinges shown in Fig. 9 are as follows. The width W2 in Fig. 9(a), which is the width of the groove facing inward on bending as measured on the surface level, is preferably 1 mm or greater. The width W3, which is at the deepest of the hinge of Fig. 9(b), is preferably 0.2 mm or greater and equal to or smaller than the width W4, which is the width of that groove on its surface level. The width W4 is preferably 1 mm or greater.

In the present embodiment, it is preferred that not only the molded article 10 but the lid 18 and the measuring container 19 be made mainly of pulp.

Since the first hinge 31 which connects the lid 18 and the molded article 10 is thin and dense as described above, repeated swings of the lid 18 do not cause the inconvenience of the hinge 31's being torn off. Therefore, the molded article 10 is favorable for use as a container from which the contents are repeatedly taken out in small portions.

Also linking up with the molded article 10 by the second thin and dense hinge 41, the measuring container 19 is not torn off the molded article 10 at the linking part during transportation. Bent and put inside the molded article 10, the measuring container 19 does not fall off during transportation. On use, the measuring container 19 is cut off the molded article 10 at the linking part 44 with a pair of scissors or a cutter.

Since the molded article 10, the lid 18 (and the measuring container 19) are integrally molded, the production process can be simplified to reduce the production cost. Not only the molded article 10 but the lid 18 (and the measuring container 19), being made mainly of pulp, can easily be disposed of. These portions can be produced from used paper, which is economically advantageous.

The molded article 10 according to the present embodiment can be produced almost in the same manner as shown in Fig. 4 by use of a mold shown in Fig. 10. In detail, the lid 18 and the measuring container 19 are integrally molded together with the molded article 10 by a papermaking technique to obtain a molded article precursor, which is a pulp deposited body obtained after papermaking and dewatering. A part of the linking part between the molded article 10 and the lid 18 or the measuring container 19 is compressed to form the first hinge 31 and the second hinge 41. The term "molded article precursor" as used herein means a pulp fiber deposited body having a given shape which is obtained after papermaking and dewatering steps. A molded article after pressing and drying steps is also included under this term.

The difference between the method of producing the molded article of this embodiment and that shown in Fig. 4 is that the molded article precursor after the heat drying step is once removed from the mold and placed on a separate member, or the molded article

precursor after the heat drying step is kept in contact with a half of the split mold, and the parts of the precursor that become the first and second hinges 31 and 41 are compressed to form the first and second hinges 31 and 41. The compression is preferably carried out by pressing the parts becoming the first and second hinges 31 and 41 with long and narrow projections whose cross-sections correspond to the shapes of the first hinge 31 and the second hinge 41, respectively. Where the molded article precursor is the one after the papermaking and dewatering steps but before the heat drying step, the formation of the first hinge 31 and/or the second hinge 41, which are made thinner and denser than the other portions, can be carried out more easily and efficiently by compressing the parts that become the first and second hinges 31 and 41.

According to the above-described method, the molded article 10 of the present embodiment can be produced efficiently and economically.

The molded article 10 can also be produced by depositing pulp on the inner surface of a papermaking mold, such as a base mold having a net laid thereon or a porous mold, to form a pulp layer, dewatering the pulp layer in a known manner, transferring the resulting molded article precursor to either a female mold or a male mold making a couple, and pressing and drying the precursor with a mating male or female mold. In this method, the first hinge 31 and/or the second hinge 41 can be formed by compressing the corresponding parts of the precursor after the pressing and drying step. The first hinge 31 and/or the second hinge 41 can also be formed simultaneously with the pressing and drying step by pressing the corresponding parts with projections for hinge formation provided on the corresponding parts of a pressing and drying mold. Where the first and second hinges 31 and 41 are formed during the pressing and heating step, a movable pressing member can be provided on part of the mold so that the precursor may be pressed by this member in an appropriate stage in the pressing and drying step to form the first and second hinges 31 and 41. This method is also efficient in producing the molded article 10 according to the present embodiment.

While the molded article 10 according to the present embodiment has both the lid 18 and the measuring container 19 linked to the molded article 10 near the opening portion 11 by the thin and dense hinges 31 and 41, respectively, it is conceivable that the molded article 10 has either one of the lid 18 and the measuring container 19 linked thereto by a thin and dense hinge. The measuring container 19 can be omitted. The measuring container 19 is not particularly limited and can be of various shapes and capacities, provided that the object of

measuring is fulfilled.

A molded article of the third embodiment has a lid for opening and shutting the open top thereof as shown in Figs. 11 and 12. The lid is a part which is separately prepared from the molded article and has a linking part with a hinge through which it is fixed to the molded article.

In detail, the lid 18 is made separately from the molded article 10. It is fixed to the main body 2 of the container via the linking part 31' having the hinge 31 which is provided on the lid 18. The structure of the lid 18 is the same as in the second embodiment.

The linking part 31' is provided at the lower edge 33a of the peripheral wall 33 as an integral part that is formed by integral molding together with the lid 18. The linking part 31' is almost rectangular and has the hinge 31 in the middle thereof. The lid 18 in this embodiment is formed mainly of pulp, and the hinge 31 is formed as a thin and dense part of the linking part 31'. More specifically, a long, narrow, and straight groove having an arched cross-section is made in the middle of the linking part 31' to form the hinge 31. The part of the linking part 31' that is farther than the hinge 31 is a joint face 31a which is adhered to the body portion 12 of the molded article 10. In the present embodiment, the linking part 31' is adhered to the body portion 12 by bringing the joint face 31a into contact with the body portion 12 and sticking an adhesive sealing member 31b over the joint face 31a as shown in Fig. 11. The lid 18 is thus fixed so that it can swing in an arc on the hinge 31 to open and close the opening portion 11 of the molded article 10.

Preferred configurations of the hinge 31 are the same as those shown in Fig. 9. Other details of the first hinge in the second embodiment also apply to the hinge 31.

As stated previously since the molded article 10 according to the present embodiment has the lid 18, which is prepared separately from the molded article 10, fixed to the molded article 10, it is produced without using a large sized mold, which is productive and economical.

In producing the molded article of the present embodiment, the linking part 31' is

integrally molded together with the lid 18 by a papermaking method, and a part of the linking part 31'-forming part of the molded article precursor after papermaking and dewatering is compressed to form the hinge 31. The term "molded article precursor" as used herein has the same meaning as defined with respect to the second embodiment. The term "linking part 31'-forming part" as used herein indicates a part which finally becomes the linking part 31'.

The molded article 10 can be produced by the same method as shown in Fig. 4 for the first embodiment. The lid 18 can be produced through almost the same steps as for the main body of the container 2.

That is, the steps from papermaking and dewatering up to heat drying are carried out in the same manner as for the preparation of the molded article 10, except for using a mold composed of a pair of splits forming a cavity configuration in conformity to the contour of the lid 18 to be molded.

The molded article precursor after the heat drying step is once removed from the mold and placed on a separate member, or the molded article precursor after the heat drying step is kept in contact with a half of the split mold. In this state, a part of the linking part 31'-forming part of the molded article precursor is compressed to form the hinge 31. As shown in Fig. 13, the compression is preferably performed by pressing a part of the linking part 31'-forming part 46 of the molded article precursor 45 with projections 47 whose cross-sections correspond to the shape of the hinge 31. The lid 18 thus prepared is fixed to the molded article 10 via the linking part 31' in such a manner that it can swing on the hinge 31 to be fitted to the fitting part of the molded article 10. With respect to the other particulars of the hinge formation that have not been described, the corresponding description given to the hinge formation in the second embodiment appropriately applies.

In the present embodiment, the shape and the number of the linking part(s) 31' are not particularly limited as long as the lid 18 and the molded article 10 are linked together thereby.

For example, a spaced pair of linking parts 31' can be attached to the molded article 10. As long as the linking part 31' can be fixed to the molded article 10, the manner of fixing is not particularly restricted. For instance, the joint face 31a can be adhered to the outer surface of the molded article 10 directly with an adhesive, or a hole can be made in the molded article 10 into which part of the linking part 31' can be fitted. It is also possible to omit the linking part 31' and to link the lid 18 to the molded article 10 by means of tape made of paper, etc. The

linking part 31' can be attached to any position of the molded article 10 provided that the lid 18 is fixed in such a manner that it may open and close the opening portion 11 of the molded article 10.

The lid 18 does not always need to be made mainly of pulp but can be an injection  
5 molded part made of a synthetic resin.

A molded article according to the fourth embodiment has its upper opening covered with a seal and a measuring container removably set on the seal as shown in Fig. 14.

According to this embodiment, the measuring container can easily be taken out for use without soiling a user's hand and with no need of assembly.

As shown in Fig. 14, a seal 63 having a removable measuring container 19 is provided  
10 to cover the upper surface of the opening portion 11 of the molded article 10.

In the present embodiment, both the seal 63 and the measuring container 19 are made by pulp molding. They can easily be prepared by integral molding according to the method described, e.g., in Japanese Patent Laid-Open No. 5-279998.

That is, a pulp component is extracted from a pulp slurry on a papermaking net formed into the integral shape of the seal 63 and the measuring container 19. The formed pulp layer is pressed from the upper side with a pressing mold made of an elastic material to remove the water content from the pulp layer to obtain a molded container precursor, which is hot pressed to obtain easily an integral pulp molded article which is the seal 63 having a three-  
15 dimensional measuring container 19 as a depression.  
20

After the integral molding, a cutting line is printed along the border between the seal 63 and the measuring container 19, or discontinuous cuts, perforations or thinner parts are made along the border thereby to make it easy to separate the measuring container 19 from the seal 63 by hand. Perforations, etc. can be made by molding.

After the molded article 10 is filled with, for example, powdered detergent, the seal 63 having the measuring container 19 as an integral part thereof is adhered at its periphery to the upper end of the molded article 10 with an adhesive to cover the opening portion 11 of the molded article 10. The powdered detergent is thus sealed in. Thereafter, the pulp molded lid 18, which is hinged to the upper side of the molded article 10, is swung shut.

On use, the lid 18 is swung open, the seal 63 is removed to open the molded article 10, and the measuring container 19 is separated from the seal 63. A predetermined amount of the powdered detergent can be measured with the measuring container 19 and put into a washing machine, etc.

According to the present embodiment, since the measuring container 19 is removably set on the seal 63, it does not bury itself in powdered detergent, causing no such troubles for a user to find it out or soil her or his hand to take it out.

Further, because the molded article 10, the seal 63, the measuring container 19, and the lid 18 are all formed by pulp molding, they are easy to dispose of.

In the present embodiment, the seal, the measuring container and the lid do not always need to be pulp molded articles and can be made of plastics and the like. Removably setting the measuring container to the seal may be such that the measuring container is releasably adhered to the seal with an adhesive.

A molded article according to the fifth embodiment has a fitting part for a measuring container integrally molded as shown in Fig. 15.

According to this embodiment, the measuring container is fitted to a prescribed position of the molded article so that it is easily detached.

As shown in Fig. 15, fitting projections 70 are integrally formed on the upper inner wall of the molded article 10, between which a cup 71 of a three-dimensional measuring container 19 made of plastics, etc. is detachably fixed.



As shown in Fig. 16, the fitting projections 70 for fitting the measuring container 19 to the upper inner wall of the molded article 10 are a pair of an upper rib and a lower rib each having a semicircular cross-section which are parallel to each other at a spacing corresponding to the distance between two facing edges of the cup 71 so that the two edges of the cup 71 may be fitted in. The cup 71 of the measuring container 19 is laterally slid in between the pair of the fitting projections 70 with its edges in contact with the inner wall of the molded article 10. The two edges of the cup 71 are thus fastened by the upper and lower fitting projections 70, and the measuring container 19 is fixed to the inner wall of the molded article 10. On use, the measuring container 19 is easily detached by sliding backward. The fitting projections 70 are integrally molded together with the molded article 10.

Since the molded article 10 according to the present embodiment has a pair of the fitting projections 70 on its upper inner wall as a fitting part for the three-dimensional measuring container 19, it can hold the measuring container 19 fixed thereto. Therefore, the measuring container 19 is not buried in powdered contents due to vibrations, etc. and can easily be taken out. The fitting projections 70 being formed on the upper inner side of the molded article 10, the measuring container 19 is positioned above the powdered contents so that it can be taken out without soiling a user's hand.

In the present embodiment, the measuring container can be disposed on the outer side or lower part of the molded article or on the seal instead on the upper inner side of the molded article. The measuring container fitting part is not limited to the rib-like projections and can be composed of other various projections formed as integral parts by a pulp molding method.

A molded article according to the sixth embodiment has a fitting part for a handle on its body portion, on which a handle is hooked up as shown in Fig. 17.

According to this embodiment, a molded article equipped with a handle which is easy to dispose of or recycle is provided at a low cost of production. In particular, a molded article and a handle both of which are made of pulp would be easier to dispose of or recycle.

The body portion 12 of the molded article 10 is made up of a front and a rear wall 12a and 12a and a right and a left wall 12b and 12b. A pair of fitting parts for a handle 74 and 74

are provided, one on the right wall 12b and the other on the left wall 12b at positions facing each other. The fitting parts 74 are formed mainly of pulp similarly to the molded article 10.

They are integral with, or separate from, the right and the left walls. The fitting parts 74 which are separate parts are attached to the right and the left walls 12b and 12b by means for joining, such as an adhesive or caulking. Totally made mainly of pulp, the molded article 10 is easy to dispose of with no necessity to separate into parts for separate disposal.

An enlarged view of the fitting part 74 is shown in Fig. 18. Seen from the side, the fitting part 74 has the shape of a mushroom, being composed of a columnar stem 74A and a semispherical cap 74B connected to an end of the stem 74A.

The handle 76 to be fitted to the fitting parts 74 has a U-shape. A fitting hole 78 is made through the handle 76 near each end of the U-shape at facing positions. Each fitting hole 78 has a shape composed of a circular hole 78A and a pair of oblong holes connecting to the circular hole 78A, the oblong holes being on the line passing through the center of the circular hole 78A. The diameter of the circular hole 78A is almost equal to or slightly greater than that of the cap 74B of the fitting part 74. The width of the oblong holes is almost equal to or slightly greater than that of the diameter of the stem 74A of the fitting part 74. The handle 76 is fitted to the molded article 10 by passing the cap 74B of the fitting part 74 of the molded article 10 through the circular hole 78A of the fitting hole 78 of the handle 76 and then pulling the handle 76 upward to fit the stem 74A of the fitting part 74 into the oblong hole 78B of the fitting hole 78 of the handle 76.

The handle 76 can be of plastics as conventionally used but is preferably made mainly of pulp similarly to the molded article 10 to exclude the necessity to dispose of separately.

In the production of the molded article according to the present embodiment, the fitting parts 74 can be formed by integral molding with the molded article 10 or formed separately from the molded article 10.

In the present embodiment, the fitting parts 74 may be metallic pins instead of pulp molded parts.

A molded article 10 according to the seventh embodiment shown in Fig. 19 is a cylindrical bottle having a thick-walled portion 87 in its opening portion 11 in the area from the upper edge 86 to a prescribed depth d, which is thicker than the body portion 12 and the bottom portion 13. The thick-walled portion 87 is continuous along the circumference of the opening portion 11. For some uses of the molded article 10, the thick-walled portion 87 may be discontinuous.

The whole opening portion 11 from the upper edge 86 to the base of the neck could be a thick-walled portion 87, but it is sufficient for the opening portion 11 to have the thick-walled portion 87 from its upper edge 86 to a prescribed depth d shown in Fig. 19 as long as sufficient mechanical strength is secured. The depth d is usually 0.5 to 50 mm, preferably 5.0 to 30 mm, while dependent on the use, the shape, and the like of the molded article.

As shown in Fig. 19, the thick-walled portion 87 projects inward. The degree of projection, represented by the width x of the projection (see Fig. 19) in the horizontal direction measured from the inner wall of a part having no such a thick-walled portion 87 in the opening portion 11, is 0.5 to 5.0 mm, preferably 1.0 to 3.0 mm, which suffices to secure the mechanical strength of the opening portion 11. Having an increased area, the upper surface 86 of the opening portion 11 offers an increased sealing surface area to enhance the adhesive strength to a seal, etc. when it is sealed.

Sufficient mechanical strength is secured for the opening portion 11 when the depth d and the width x of the projection is such that  $d/x$  is from 0.1 to 100, preferably 1 to 30. The part of the opening portion 11 that is deeper than the depth d can be tapered so that the width x of the projection gradually approaches zero as shown in Fig. 6.

It is preferred for the upper surface 86 of the opening portion 11 to be smooth to secure improved sealability when it is sealed with a seal, etc. Sufficient sealability will be secured with the upper surface 86 having such smoothness as to have a center-line average roughness (Ra) of about 50  $\mu\text{m}$  or smaller and a maximum height ( $R_{\text{max}}$ ) of about 500  $\mu\text{m}$  or smaller. The upper surface 86 can be made smooth by, for example, a post treatment such as polishing by a prescribed means after the production of the molded article 10. Preferably, a sufficiently smooth upper surface 86 is obtained without the above-described post treatment

by producing the molded article by use of the papermaking mold hereinafter described.

A preferred method for producing the molded article according to this embodiment will be described by referring to Figs. 20 to 22.

The molded article 10 of the present embodiment is preferably produced by use of a papermaking mold which comprises:

a set of splits, each having a plurality of interconnecting holes connecting the outside and the inside, which are joined together to form a cavity in conformity to the outer contour of an article to be molded and

a mold for creating stagnation which is to be inserted into the above-described cavity to form a space where a slurry stagnates.

Fig. 20 shows an exploded perspective view of the mold used to produce the molded article of the present embodiment. The mold comprises a set of splits 3 and 4 having the same structure as the splits 3 and 4 shown in Fig. 4 except for the cavity configuration and a mold 97 for causing stagnation (hereinafter "stagnation-making mold") which is inserted from the outside into the cavity to form a space with the inner wall of the cavity, in which space a slurry stagnates. The inner wall of the split 4, while not shown in Fig. 20, has the same configuration as that of the mating split 3.

As shown in Figs. 20 and 21, the split 3 is composed of a papermaking part 91A and a manifold part 91B. The papermaking part 91A is fitted into the manifold part 91B to make up the split 3. With this fitting, there is formed a manifold 91C between the papermaking part 91A and the manifold part 91B. The inner side of the papermaking part 91A may be covered with a net of prescribed mesh. A plurality of interconnecting holes 94, 94, ... are regularly pierced through the papermaking part 91A from the inner to the outer surfaces. These interconnecting holes 94 connect with the manifold 91C. A plurality of suction holes 91D are also pierced in both sides of the manifold part 91B thereby to form interconnecting passageways in the split 3 which connect the outside of the manifold part 91B and the inner surface of the papermaking part 91A.

On joining the splits 3 and 4 together, there is formed a cavity 1 in conformity to the

contour of an article to be molded as shown in Fig. 20. The part of the cavity 1 that corresponds to the opening portion 11 of the molded article (hereinafter referred to as "the cavity part corresponding to an opening portion") has an opening open to the outside. Into this part is inserted a wall 97B for making the slurry stagnant (hereinafter "a slurry stagnation wall", described later) of the stagnation-making mold 97. While not depicted, the inner side of the cavity part corresponding to the opening portion has grooves corresponding to a screw thread.

As shown in Figs. 20 and 21, the stagnation-making mold 97 is composed of a rectangular top plate 97A and a cylindrical slurry stagnation wall 97B hanging from approximately the center of the lower side of the top plate 97A. The slurry stagnation wall 97B makes a hollow cylinder which vertically pierces the stagnation-making mold 97 and serves as a gate 97C through which a slurry is poured into the mold. The slurry stagnation wall 97B of the stagnation-making mold 97 is inserted into the cavity part corresponding to the opening portion, and the lower side of the top plate 97A and the upper end of the split mold 3, 4 are brought into contact to complete the mold.

The diameter of the slurry stagnation wall 97B is smaller than that of the cavity part corresponding to the opening portion. Therefore, with the slurry stagnation wall 97B inserted in the cavity part corresponding to the opening portion, an annular space 98 in which a slurry stagnates is formed between the inner wall of that part of the cavity and the outer side of the slurry stagnation wall 97B.

Figs. 22(a) and (b) illustrate part of a papermaking step, one of the steps for producing the molded article 10 by use of the above-described mold, wherein (a) is the papermaking step, and (b) is the step of opening the mold and removing a pulp deposited body. In Figs. 22, part of the mold is omitted from the illustration for the sake of simplicity.

As shown in Fig. 22(a), an injection pump (not shown) is started to suck up a pulp slurry from a pulp slurry storage tank (not shown) and inject the pulp slurry under pressure into the mold through the slurry gate 97C. Then, the cavity 1 is evacuated by suction from the outside of the splits 3 and 4, thereby to suck up the water content of the pulp slurry and to build up pulp fibers on the inner wall of the cavity 1. The pulp slurry easily goes around to

fill the annular space 98 formed between the outer side of the slurry stagnation wall 98B and the inner side of the cavity part corresponding to the opening portion and stays there, making the pulp fibers be accumulated there more than on the other parts of the cavity 1. Since the pulp slurry is injected into the cavity 1 under pressure, the pulp slurry pressure is equal in every part of the cavity 1 so that the annular space 98 can sufficiently be filled with the pulp slurry. It follows that the pulp deposited body 5 formed on the inner wall of the cavity 1 has a larger wall thickness in its upper edge and its vicinities than in the other portions. The thickness of the thicker portion corresponds to the breadth of the annular space 98.

Then, the same steps as the step of inserting a pressing member and the step of pressing and dewatering shown in Figs. 4(b) and (c) are carried out. As shown in Fig. 19, the resulting molded article 10 can have sufficiently enhanced strength in its thick-walled portion 87 near the upper surface 86 of the opening portion 11 particularly through the pressing and dewatering step.

After the shape of the inner wall of the cavity 1 is sufficiently transferred to the pulp deposited body 5, and the pulp deposited body 5 is dewatered to a prescribed water content, the pressurizing fluid in the pressing member 6 is withdrawn, and the pressing member 6 is removed from the cavity 1 as shown in Fig. 22(b). The mold is opened, and the pulp deposited body 5 in a wet state with a prescribed water content is taken out. Thereafter, the pulp deposited body 5 is forwarded to the step of heat drying in the same manner as in the method for producing the molded article of the first embodiment to obtain the molded article 10.

As stated above, the molded article 10 thus produced has a thick-walled portion 87 in the opening portion 11 from the upper surface 86 to a prescribed depth d, which is thicker than the body portion 12 and the bottom portion 13. In addition, the upper surface 86 is so smooth as to exhibit sufficient adhesive strength when sealed with a seal, etc. without being given any special post treatment.

The thick-walled portion 86 in the molded article 10 of the present embodiment can project both inward and outward. If desired, the part of the thick-walled portion projecting outward can serve as, for example, a projection for fitting a cap on.

A molded article 10 of the eighth embodiment which is shown in Fig. 23 has a thin plastic layer on its outer surface 104 and inner surface 105. Such plastic layers not only give the molded article 10 further increased strength but effectively prevent leaks of the contents.

Because the outer surface 104 and the inner surface 105 of the molded article 10 are smooth, the plastic layers can be satisfactorily adhered to the outer surface 104 and the inner surface 105. While the thickness of each plastic layer is selected appropriately according to the wall thickness of the molded article 1, the kind of the contents and the like, it is usually 5 to 300  $\mu\text{m}$ , particularly 10 to 200  $\mu\text{m}$ , especially 20 to 100  $\mu\text{m}$ . The two plastic layers may be the same or different in thickness. The materials constituting each plastic layer include various thermoplastic synthetic resins such as polyethylene and polypropylene, emulsion latices such as an acrylic emulsion, and waxes such as a hydrocarbon wax.

Where, in particular, the molded article 10 is laminated with a plastic film, the plastic is chosen from appropriate materials according to the purpose of laminating, for example imparting water resistance or gas barrier properties. For instance, a film of a polyolefin, e.g., polypropylene or polyethylene, a polyester, e.g., polyethylene terephthalate or polybutylene terephthalate, polystyrene, polycarbonate, etc. can be used. A multilayer film composed of a plurality of films made of these materials can also be used.

A plastic layer can be formed on the inner surface of the molded article 10 by, for example, replacing the pressing member 6 having elasticity used in the molded article production method shown in Fig. 4 with a pressing member of bag form made of a plastic film of polyethylene or polypropylene, etc., the plastic film having aluminum or silica deposited thereon, the plastic film laminated with aluminum foil, etc., and the like. After the pulp deposited body 5 is pressed by such a pressing member of bag form, it is not taken out but remains superposed on the inner surface of the pulp deposited body 5 thereby to form a plastic layer on the inner surface of the molded article 10.

A plastic layer can also be formed on the inner surface of the molded article 10 by replacing the elastic pressing member with a closed-end cold parison (preformed parison) having been preheated to a predetermined temperature. The parison is inserted into the pulp deposited body 5, and a pressurizing fluid is fed into the parison to inflate it. The plastic film is thus adhered to the inner surface of the pulp deposited body thereto to form a plastic layer on the inner surface of the molded article 10.

As an alternative for laminating the inner surface of the molded article 10 with a plastic film, vacuum forming or pressure forming is also useful. The method depicted in Fig. 24 is suitable. In this method a first vacuum chamber 130 and a second vacuum chamber 140 are used as shown in Fig. 24(a). The first vacuum chamber 130 has an opening 131 at the top and a through-hole 132 in the side wall near the bottom. The through-hole 132 is connected to a suction means not shown. The inner shape of the cross-section of the opening 131 is made slightly larger than the outer contour of the cross-section of the opening portion 11 of the molded article 10. On the other hand, the second vacuum chamber 140 has an opening 141 at the bottom. The opening 141 of the second vacuum chamber 140 is shaped to close the opening 131 of the first vacuum chamber 130. The inner shape of the cross-section of the opening 141 is made larger than that of the opening 131 of the first vacuum chamber 130. The upper side of the second vacuum chamber 140 has a plurality of through-holes 142, 142 ..., which are connected to a suction means not shown. A heating means 143, such as an electric heater, is provided on the inner wall of the upper side of the second vacuum chamber 140.

The inner surface of a hollow container 1 can be laminated with a plastic film by use of the vacuum chambers 130 and 140 as follows. As shown in Fig. 24(a), a molded article 10 is placed in the first vacuum chamber 130 with its opening portion 11 up. The depth of the first vacuum chamber 130 is virtually the same as the height of the molded article 10 so that the upper opening edge of the placed molded article 10 and that of the first vacuum chamber 130 are almost even.

In this state a stretchable plastic film 150 in its unstretched state is placed to close the opening 131. Larger than the cross-section of the first vacuum chamber 130, the plastic film 150 closes the opening 131 and also covers all the upper surface of the opening 131. Subsequently, the second vacuum chamber 140 is set on the first vacuum chamber 130 with its opening 141 facing the plastic film 150. Since the first and the second vacuum chambers 130 and 140 are of the same shape in their cross-sections, the plastic film 150 are held in between the periphery of the opening 131 of the first vacuum chamber 130 and the periphery of the opening 141 of the second vacuum chamber 140. Each of the first and the second vacuum chambers 130 and 140 is thus made air-tight. To maintain sufficient air tightness in each vacuum chamber, the two vacuum chambers may be fastened together by a fixing means such as a metal fastener.



The second vacuum chamber 140 is then sucked by a suction means (not shown) connected to the through-holes 142, whereby the second vacuum chamber 140 is evacuated, and the plastic film 150 is drawn up in the second vacuum chamber 140 and stretched gradually. On continuing evacuating the second vacuum chamber 140, the plastic film 150 is further stretched and comes into close contact with the inner wall of the second vacuum chamber 140 as shown in Fig. 24(b). The stretching in this stage is preliminary. The stretch ratio is decided appropriately in accordance with the shape of the molded article 10 to be laminated with the plastic film 150. In general, when the plastic film 150 is preliminarily stretched with the ratio of the surface area of the preliminarily stretched plastic film 150 to that of the plastic film superposed on the molded article 10 (the former/the latter) being 3 to 0.7, particularly 2 to 0.9, laminating the molded article 10 with the plastic film 150 can be accomplished with improved adhesion, and laminating the molded article 10 having a complicated shape is carried out more easily. The pressure (degree of vacuum) in the second vacuum chamber 140 is such that the plastic film 150 may be preliminarily stretched to come into intimate contact with the inner wall of the second vacuum chamber 140. While depending on the thickness and material of the plastic film 150, the pressure is generally 40 kPa or lower, preferably 1 to 1300 Pa.

While the preliminarily stretched plastic film 150 is in intimate contact with the inner wall of the second vacuum chamber 140, it is heated to a prescribed temperature by the heating means 143 provided on the inner wall of the upper side of the second vacuum chamber 140. The plastic film 150 is softened by this heating to further secure the intimate contact of the plastic film 150 with the molded article 10 in laminating and to further facilitate laminating the molded article 10 having a complicated shape. For example, in using polyethylene or polypropylene having a glass transition temperature ( $T_g$ ) of room temperature ( $23^{\circ}\text{C}$ ) or lower as a constituent material of the plastic film 150, the heating temperature preferably ranges from (melting point +  $30^{\circ}\text{C}$ ) to (melting point -  $70^{\circ}\text{C}$ ), particularly from (melting point +  $5^{\circ}\text{C}$ ) to (melting point -  $30^{\circ}\text{C}$ ). In using polyethylene terephthalate or polystyrene whose  $T_g$  is room temperature or higher as a constituent material, the heating temperature preferably ranges from ( $T_g + 5^{\circ}\text{C}$ ) to ( $T_g + 150^{\circ}\text{C}$ ), particularly ( $T_g + 10^{\circ}\text{C}$ ) to ( $T_g + 100^{\circ}\text{C}$ ). Within these ranges, the plastic film 150 can be superposed with closer contact on the molded article 10 without tearing. Where the plastic film 150 is made of two or more kinds of materials, the glass transition temperature of the material having the lowest glass transition temperature is taken as the above-described glass transition temperature.

While the plastic film 150 being in close contact with the inner wall of the second vacuum chamber 140 by suction, the first vacuum chamber 130 is evacuated by a suction means (not shown) connected to the through-hole 132. Since there is a gap between the inner wall of the opening 131 of the first vacuum chamber 130 and the outer wall of the opening portion 11 of the molded article 10, the inside and the outside of the molded article 10 connect with each other to let gas flow therethrough. Therefore, the above evacuation by suction creates a vacuum in the first vacuum chamber 130, i.e., the inside and the outside of the molded article 10 similarly to the inside of the second vacuum chamber 140. In this state, the plastic film 150, which has been in intimate contact with the inner wall of the second vacuum chamber 140, is not drawn into the first vacuum chamber 130 by the evacuation of the first vacuum chamber 130. While not particularly limiting, a preferred pressure (degree of vacuum) of the first vacuum chamber 130 is usually 40 kPa or lower, particularly 1 to 1300 Pa.

Then, the evacuation of the second vacuum chamber 140 is stopped. Further, the vacuum in the second vacuum chamber 140 is broken and, at the same time, pressure is applied into the second vacuum chamber 140 to a predetermined pressure. These operations can be performed instantaneously by switching a three-way valve, etc. Because the first vacuum chamber 130 is in the evacuated state, the plastic film 150 which has been in intimate contact with the inner wall of the second vacuum chamber 140 is instantaneously drawn and stretched toward the inside of the first vacuum chamber 130, i.e., the inside of the molded article 10 in the present embodiment, whereby the inner surface of the molded article 10 is laminated with the plastic film 150 with intimate adhesion as shown in Fig. 24(c). In other words, the plastic film 150 is stretched in the direction opposite to the direction of preliminary stretching. Having been heated to a predetermined temperature until the vacuum of the second vacuum chamber 140 is broken, the plastic film 150 can be stretched and adhered to the molded article 10 extremely smoothly, being effectively prevented from, e.g., tearing on stretching. Pressure application into the second vacuum chamber 140 is carried out with a prescribed pressurizing fluid, conveniently air. In order for the plastic film 150 to be brought into intimate contact with the molded article 10 without tearing, the pressure to be applied is preferably 100 to 3000 Pa, particularly 200 to 1000 Pa.

Where laminating the molded article 10 with the plastic film 150 is conducted with the molded article 10 being heated to a predetermined temperature, the plastic film 150 can be

superposed on the molded article 10 with further improved adhesion while being prevented from tearing more effectively. This is because satisfactory stretchability of the plastic film 150 is maintained during the laminating. The molded article 10 can be heated by, for example, a prescribed heating means provided on the inner side of the side wall of the first vacuum chamber 130. A preferred heating temperature of the molded article 10 is from 40 to 150°C for preventing re-shrinkage of the plastic film 150 and securing the production efficiency.

After the plastic film 150 is superposed, the evacuation by suction of the first vacuum chamber 130 is stopped, and the inner pressure is increased to atmospheric pressure. The second vacuum chamber 140 is then removed, and the molded article 10 laminated with the plastic film 150 is taken out of the first vacuum chamber 130. At this time point, there remains the free plastic film 150 around the opening portion of the molded article 10, which is trimmed to give the molded article 10 shown in Fig. 24(d) which has the inner surface thereof and the upper edge of its opening portion intimately laminated with the plastic film 150.

According to the above-mentioned method of production, the plastic film 150 can be superposed on the molded article 10 with good adhesion without tearing even if it is stretched at a stretch ratio as high as 4 to 10, the stretch ratio of the plastic film 150 being defined as a ratio of the surface area of the plastic film 150 superposed on the molded article 10 and the opening area of the opening 131 of the first vacuum chamber 130 (the former/the latter).

The above production method has a merit that the molded article 10 can be laminated with a film irrespective of whether or not it has air permeability. Further, because it is not necessary to evacuate through the wall of the molded article 10, the time required for evacuation by suction can greatly be shortened as compared with conventional vacuum forming and the like to markedly improved the productivity. Furthermore, the molded article 10 does not suffer from deformation by evacuation, it is not necessary to use a reinforcing mold as in conventional vacuum forming and the like, which leads to production cost reduction.

Where the above-described laminating method is adopted, it is preferred to use a stretchable film as the plastic film. In this case, it is preferred for the plastic film to have a

thickness of about 5 to 200  $\mu\text{m}$ , particularly about 20 to 100  $\mu\text{m}$ , after laminating so as to impart desired characteristics such as water resistance and gas barrier properties to the molded article. The thickness before laminating, while varying depending on the desired thickness after laminating, the stretch ratio, etc., preferably ranges from about 50 to 1000  $\mu\text{m}$ , particularly about 100 to 500  $\mu\text{m}$ , from the viewpoint of handling properties during the production and the plastic film heating efficiency.

In carrying out laminating with the plastic film 150 shown in Fig. 24, where the molded article 10 is placed upside down (the opening portion 11 of the molded article 10 facing downward), the outer surface of the molded article 10 can be laminated with the plastic film 150. It is possible to laminate both the inner surface and the outer surface (except the bottom surface) of the molded article 10 with a single plastic film at the same time by making the opening 131 of the first vacuum chamber 130 extremely larger than the outer contour of the opening portion 11 of the molded article 10 to provide a wide gap between the opening 131 of the first vacuum chamber 130 and the opening portion 11 of the molded article 10. In this case, another film can be set between the bottom portion of the molded article 10 and the inner wall of the bottom of the first vacuum chamber 130 so that the inner and the outer surfaces, including the bottom surface, of the molded article 10 may be laminated with the two films simultaneously.

When the molded article having the inner and/or the outer surfaces thereof laminated with the plastic film is left to stand at 60°C for 30 minutes, the plastic film preferably has a shrinkage percentage of 30% or less, particularly 10% or less.

If the shrinkage percentage exceeds 30%, there is a fear that the plastic film peels in parts and that tearing of the molded article 10 initiates from the parts where the plastic film peels. That is, long-term storage stability reduces. The shrinkage percentage is obtained from the distance between two arbitrary points on the plastic film-laminated surface of a molded article measured before and after the storage under the above-described conditions according to formula:  $(1 - \text{distance before storage} / \text{distance after storage}) \times 100$ . The shrinkage percentage can be made 30% or less by, for example, heating the plastic film-laminated molded article to the glass transition point of the plastic film or a higher temperature, followed by slow cooling. Where the plastic film is a laminate comprising two or more plastic materials, the heating is at or above the glass transition point of the plastic

material having the lowest glass transition point.

There is another embodiment for forming a plastic layer on the outer and/or the inner surfaces of a molded article, which comprises powder coating the outer and/or the inner surfaces of the molded article to form a plastic layer(s).

If a solvent- or water-based coating is used for plastic layer formation, the plastic layer tends to form micropores while the solvent or the like evaporates, resulting in a failure to manifest sufficient gas barrier properties (shielding against water or oxygen). There is also a fear that the solvent, etc. may deform the molded article. A plastic layer formed by powder coating is free from these disadvantages, providing a molded article with sufficient gas barrier properties.

Powder which can be used for powder coating includes powder of olefin resins, polyester resins, epoxy resins, acrylic resins, etc. The powder can consist solely of the resin or, if necessary, it can be colored by addition of various pigments. In addition, conventional additives known to be useful in coating compositions can be used with no particular restriction. Such additives include leveling agents, e.g., acrylate polymers and silicone resins, and pinhole preventing agents, e.g., benzoin. These additives are added in an amount of about 0.1 to 5 parts by weight each per 100 parts by weight of the resin. The total thickness of the plastic layer(s) (the total of the plastic layers formed on the outer and the inner surfaces of a molded article) is decided appropriately according to the use of the molded article, the wall thickness, the kind of the contents, and the like and is usually from 50 to 600  $\mu\text{m}$ . From the standpoint of water vapor permeability, productivity, and cost, a preferred total thickness is 100 to 400  $\mu\text{m}$ .

Powder coating can be carried out with a coating gun, which has at the tip thereof a nozzle equipped with a corona electrode for forcibly charging the powder simultaneously with ejecting a powder coating. The powder coating ejected and charged simultaneously adheres to the surface to be coated, i.e., the outer and/or the inner surfaces of the molded article by electrostatic force. To secure the adhesion, it is preferred to apply a voltage of -10 to -80 kV, particularly -40 to -70 kV, to the powder coating.

Application of the powder coating is followed by a baking step in which the applied powder coating is melted and hardened to form a plastic layer. A baking oven capable of heating to a prescribed temperature is used for baking. From the standpoint of productivity, smoothness of the coating film, and prevention of scorching, the baking is carried out at a temperature of 70 to 230°C, particularly 140 to 200°C, for a period of 1 to 20 minutes, particularly 5 to 20 minutes.

There is still another embodiment for forming a plastic layer on the outer and/or the inner surfaces of a molded article, which comprises applying a resin solution or a resin emulsion to the outer and/or the inner surfaces of a molded article to form a plastic layer. In this embodiment, the plastic layer preferably has a thickness of 5 to 300  $\mu\text{m}$ , particularly 20 to 150  $\mu\text{m}$ , and the ratio of the thickness of the plastic layer to the thickness of the molded article (the former/the latter) is preferably 1/2 to 1/100, particularly 1/5 to 1/50.

If the thickness of the plastic layer is smaller than 5  $\mu\text{m}$ , the waterproofing and water vapor proofing effect tends to be insufficient for giving the contents sufficient storage stability. If the thickness exceeds 300  $\mu\text{m}$ , the plastic layer needs time for drying, and the coating tends to sag while applied, resulting in such defects as unevenness of thickness. The thickness of the plastic layer can be measured by microscopic observation of the section of the molded article. The molded article according to this embodiment has a clear boundary between the pulp fiber which constitutes the molded article and the resin which constitutes the plastic layer unlike an article of which the plastic layer is formed by coating a molded article with a coating composition in a conventional manner. That is, in a conventional method, an aqueous solution of a polymer penetrates into an undried molded article so that the boundary between the pulp fiber and the polymer is indefinite, whereas the molded article of the present embodiment is less pervious to the resin to make the boundary definite. As a result, the molded article can be made waterproof and water vapor proof with a smaller amount of the resin than needed conventionally, and the pulp fiber can be disintegrated more easily when recycled.

If the thickness ratio of the plastic layer to the molded article exceeds 1/2, disintegrability in recycling is poor. If it is less than 1/100, sufficient waterproofness and water vapor proofness cannot be obtained. The thickness of the molded article is appropriately decided according to the use, etc. so that the above ratio may fall within the

range of from 1/2 to 1/100. The thickness is preferably 100 to 3000  $\mu\text{m}$ , still preferably 500 to 2000  $\mu\text{m}$ .

The resin used in the coating composition for forming a plastic layer includes acrylic resins, styrene-acrylic resins, ethylene-vinyl acetate resins, styrene-butadiene rubber resins, polyvinyl alcohol resins, vinylidene chloride resins, waxes, fluorine resins, silicone resins, and copolymers and polyblends of these resins.

In order to control penetration of the coating composition into the molded article, it is preferred for the molded article to have a void of 30 to 70%, particularly 40 to 60%. The void is calculated from the following formula (1). In formula (1), the density of a molded article is calculated from the weight and the thickness of a piece cut out of the molded article, and the density of the material which constitutes the molded article is calculated from the proportions of pulp fiber and other components and the density.

$$\text{Void}(\%) = 1 - \frac{\text{Density of Molded Article}}{\text{Density of Material constituting Molded Article}} \times 100 \quad (1)$$

With too small the void, the molded article may be too impervious to the coating composition, tending to have reduced adhesion to the plastic layer. Taking the penetrability of the coating composition into consideration, it is preferred for the molded article to have a Cobb's water absorptiveness (JIS P8140) of 5 to 600  $\text{g}/(\text{m}^2 \cdot 2 \text{ min})$ , particularly 10 to 200  $\text{g}/(\text{m}^2 \cdot 2 \text{ min})$ .

The coating composition is applied by spraying with a prescribed spraying means after the wet pulp deposited body 5 obtained in Fig. 4(b) is preliminarily dried to a prescribed water content, e.g., about 0.1 to 25% by weight. The void of the molded article being within the above range, the coating composition hardly penetrates into the molded article. As a result, most of the coating composition remains on the surface of the molded article, succeeding in manifesting sufficient waterproofness and water vapor proofness with a smaller amount of the coating composition than conventionally required. In addition, reduction in

disintegrability of the pulp fiber in recycling is avoided. In using an emulsion as a coating composition, it is desirable to use an emulsion having a resin particle size of about 0.01 to 10  $\mu\text{m}$  for controlling penetration of the emulsion into the molded article.

Yet another embodiment for forming a plastic layer on the outer surface of the molded article 10 comprises covering the outer surface of the molded article 10 with a shrink film with or without prescribed letters, figures, symbols, etc. printed thereon. The shrink film covers the entire outer surface of the molded article 10 so that penetration of water or oxygen from the outside into the inside can be prevented thereby to prevent reduction in paper strength of the molded article 10 and to prevent mold development in the contents. Further, reduction in quality of the contents due to penetration of water or oxygen can also be prevented. Furthermore, the strength of the molded article 10 is further enhanced, and the contents are effectively prevented from leaking.

According to the kind of the contents, the shrink film does not need to cover the entire outer surface of the molded article 10 as shown in Fig. 25. The embodiment shown in Fig. 25 is especially effective where the contents are such that generate gas on moisture absorption and the like. The shrink film 151 covers not all the outer surface of the molded article 10 but the area up to the height of or above the upper level of contents 152 and below the top of the container (the space between the upper level of the contents 152 and the top of the container is called a head space). In case when the contents react due to moisture absorption, etc. to generate gas, and the gas is accumulated in the head space, the gas has its escape blocked if the outer surface around the head space is covered with the shrink film 151. It follows that the molded article 10 is inflated and deformed, which makes the molded article 10 instable and, in the worst case, ends in a burst. According to the wrapping mode shown in Fig. 25, such a phenomenon does not occur because the generated gas is allowed to escape outside through the wall around the head space of the molded article 10.

The wrapping mode of Fig. 25 also has a merit that the shrink film can be saved. It may be conceivable that water or oxygen can enter through the wall around the head space of the molded article 10. Even if it happens, the contact of water or oxygen with the contents is indirect as mediated by the head space. This indirect contact of water or oxygen is far slower than the direct content of water or oxygen with the contents through the wall of the molded article 10 in view of material transfer. Accordingly only if the molded article 10 is



wrapped up to the height of the contents, i.e., only if the direct contact through the wall of the molded article 10 is avoided, penetration of water or oxygen through the wall around the head space of the molded article 10 is not so problematical.

The shrink film 151 comprises a film of an olefin resin, a polyester resin, etc. For example, polyethylene terephthalate (PET), oriented polystyrene (OPS), etc. are useful as a material having good low-temperature shrinkability and high stiffness. For shrink packaging a product all over (overwrapping), polypropylene (PP), polyethylene (PE), etc. are useful as a thin and well-stretchable material. The above-described materials of shrink films comprise a uniaxially or biaxially stretched film having a single-layer or multilayer structure. Taking shrink finish, dimensional stability, and strength into consideration, it is desirable to choose a material having a heat shrinkage percentage (JIS Z1709) of 40% or more, a spontaneous shrinkage percentage (40%, 7 days) of 2% or less, a tensile strength of  $20 \times 10^6$  Pa or more in the direction of shrinkage, and an elongation of 50% or more. The thickness of the shrink film 151, which is appropriately selected according to the use of the molded article 10 covered with the shrink film 151, the wall thickness of the molded article 10, the kind of the contents, and the like, is usually 10 to 150  $\mu\text{m}$ , particularly 30 to 70  $\mu\text{m}$ .

The molded article 10 having the outer surface thereof covered with the shrink film has an oxygen permeability of  $500 \text{ cm}^3/(\text{m}^2 \cdot \text{hr} \cdot \text{atm})$  or less, particularly  $100 \text{ cm}^3/(\text{m}^2 \cdot \text{hr} \cdot \text{atm})$  or less. It prevents the inside thereof from getting into a peroxidized state thereby to prevent reduction or deterioration of the quality of the contents. The oxygen permeability is measured according to the method specified in JIS K7126.

The molded article having the outer surface thereof covered with a shrink film is preferably produced by surrounding the molded article having a water content of 5 to 35% by weight by the shrink film and applying microwaves to shrink the shrink film into intimate contact with the molded article and, at the same time, to dry the molded article.

As shown in Fig. 26(a), the entire outer surface of a molded article 10 is surrounded by a shrink film 151. It is preferred to use the molded article 10 produced by the method of Fig. 4(d) which has a prescribed water content. The shrink film is prepared by making a sheet into a cylinder, sealing one end of the cylinder in the form of an arch (generally called R

sealing), and cutting the other end. In this state, the gap between the body and the bottom portions and the shrink film is not so wide, while the gap between the opening portion and the shrink film is relatively wide.

An overcover 154 having a lid part 153 having a down-wall hanging from its periphery is put over both the opening portion of the molded article 10 and the upper part of the shrink film that surrounds the opening portion. The lid part 53 including the down-wall is capable of generating heat on irradiation with microwaves. The gap between the inner side of the down-wall and the shrink film is preferably as small as possible.

In this state, microwaves are applied, whereupon the water content of the molded article 10 is heated to generate heat, and the shrink film shrinks to tightly adhere to the molded article 10 by the generated heat. At the same time, the water content is removed from the molded article 10 to finally dry the molded article. In other words, this method can achieve the two steps - shrinking the shrink film 151 and finally drying the molded article - in a single operation of microwaves application.

On being irradiated with microwaves, not only the molded article 10 but the lid part 153 of the overcover 154 generate heat, with which the shrink film, particularly of the area around the opening portion of the molded article 10, shrinks to reduce the gap between the shrink film and the outer surface of the opening portion. Thus, the heat generated from the opening portion itself is added to the shrink film to accelerate the shrinkage of the shrink film.

As a result, shrinkage around the opening portion that is not easy due to the diameter difference from the other portions can be achieved very easily. Additionally, the shrink film after shrinkage has improved appearance. Thus, shrink wrapping by the use of the overcover 154 is effective in case where the molded article has different diameters from its opening portion to the bottom portion. Where the opening portion has a smaller diameter than the body portion, it is particularly effective where the diameter of the opening portion is not more than 50% of that of the body portion.

As described above, the lid part 153 of the overcover 154 is capable of generating heat on microwaves application. The lid part 153 is preferably made of water-containing wood, paper, sponge or nonwoven fabric, etc., taking into consideration ease in shaping in

conformity with the outer contour of a molded article, good heat generation efficiency, satisfactory properties of covering a shrink film, and satisfactory operating properties. The shape of the lid part 153 is not particularly limited as long as the shrink film around the opening portion of the molded article 10 can be surrounded thereby.

5           The wavelength of the microwaves applied is generally 300 MHz to 300 GHz. A wavelength providing the highest heat generation efficiency is selected appropriately.

The molded article 10 thus covered with the shrink film is then filled with the contents. Depending on the kind of the contents, filling the molded article 10 which is preliminarily dried with the contents may be followed by covering with the shrink film.

10           The present invention is not limited to the above-described embodiments, and various modifications can be made therein. The steps, apparatus, elements and the like used in each of the above-described embodiments are interchangeable with each other. While the second to eighth embodiments have been described as embodiments of the first aspect of the invention, they shall apply the second aspect. The molds used in the present invention can be composed of a set of two or three or more splits in accordance with the shape of articles to be molded. The same applies to the heating molds.

#### Industrial Applicability:

15           The present invention provides a molded article made mainly of pulp the side walls of which have a large angle to the ground and which has a large depth. The present invention also provides a molded article made mainly of pulp which involves no reduction in strength, has a satisfactory appearance, and has a depression or a projection of prescribed shape around its opening or body portions. These molded articles can be produced at a low cost. Besides, they can be recycled or incinerated after use, which leads to reduction of waste.

## CLAIMS

1.(amended) A molded article made predominantly of pulp and comprising a bottom portion and a body portion, wherein the angle between the outer surface of a side wall of said body portion and the ground contact plane of said bottom portion is 85° or greater, the height of said body portion is 50 mm or more, and said molded article has corners whose thickness is greater than the thickness of other portions.

2. The molded article according to claim 1, which is seamless.

3.(amended) A molded article made predominantly of pulp and comprising a bottom portion, a body portion and an opening portion, wherein said body portion has a depression or a projection, or said opening portion has an extension extending inward from the peripheral edge thereof, said depression or said projection is continuous only in the horizontal or oblique direction provided that said depression or said projection is continuous in a straight line, said body portion is seamless, and said molded article has corners whose thickness is greater than the thickness of other portions.

4.(amended) The molded article according to claim 3, which has a wall thickness is 0.1 mm or more and has corners whose thickness is greater than the thickness of other portions.

5. The molded article according to claim 3, which has a lid for opening and closing said opening portion of said molded article and/or a measuring container, said lid and/or said measuring container being linked with said molded article by integral molding via a first hinge and/or a second hinge which is/are thin and dense.

6. The molded article according to claim 3, which has a lid for opening and closing said opening portion of said molded article, said lid being a part prepared separately from said molded article and fixed to said molded article via a linking part having a hinge, said linking part being provided on said lid.

7. The molded article according to claim 3, wherein the upper surface of said opening portion of said molded article is covered with a seal, and a measuring container is removably set on said seal.

8. The molded article according to claim 3, which is provided with a fitting part for a measuring container by integral molding.

09868040.072301

**ABSTRACT**

A molded article (10) made predominantly of pulp and comprising a bottom portion (13) and a body portion (12), wherein the angle  $\theta$  between the outer surface of a side wall of the body portion (12) and the ground contact plane (B) of the bottom portion (13) is  $85^\circ$  or greater, and the height of the body portion (12) is 50 mm or more.

03668040-072301

090604-07201

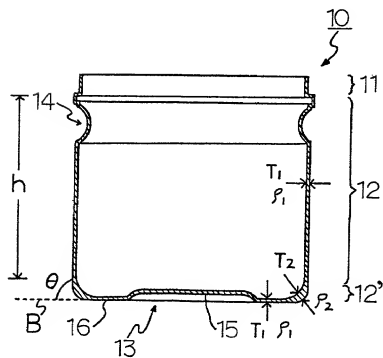


Fig.3




Fig. 4 (a) Fig. 4 (b) Fig. 4 (c) Fig. 4 (d)

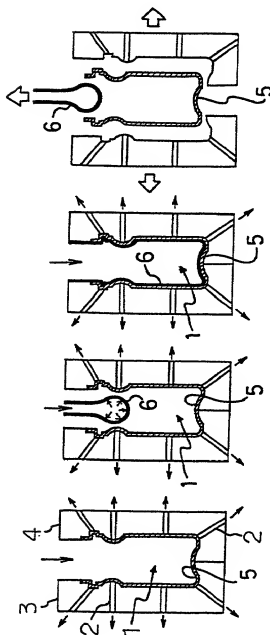




Fig.5

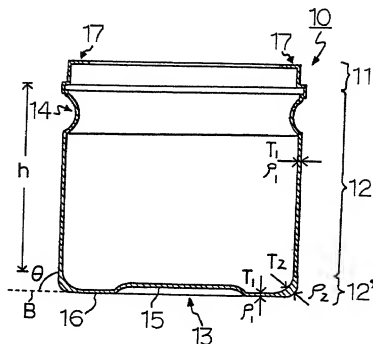


Fig.6

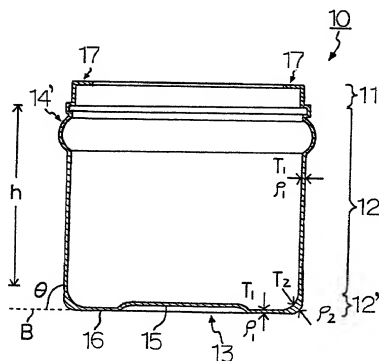


Fig.7

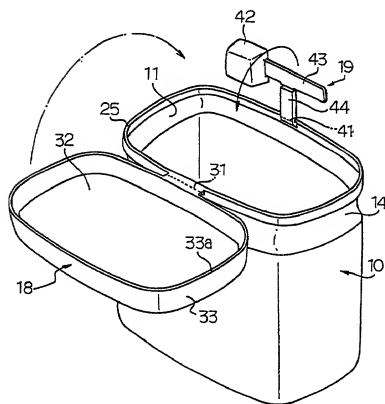


Fig.8

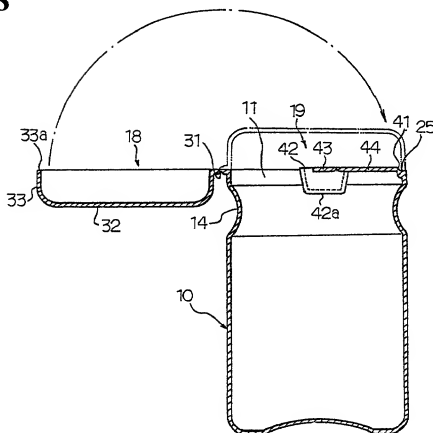


Fig. 9 (a)



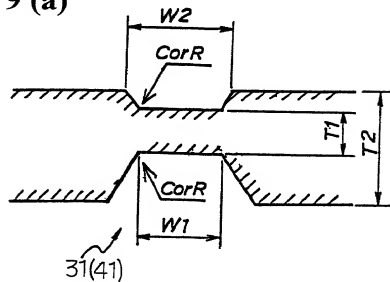



Fig. 9 (b)

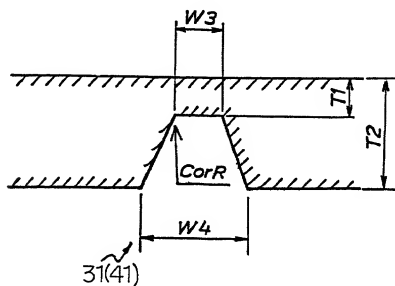


**Fig.10**




**Fig.11**

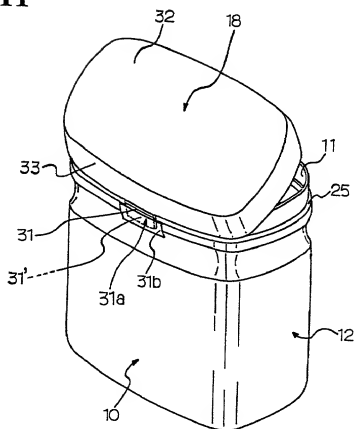


**Fig.12**

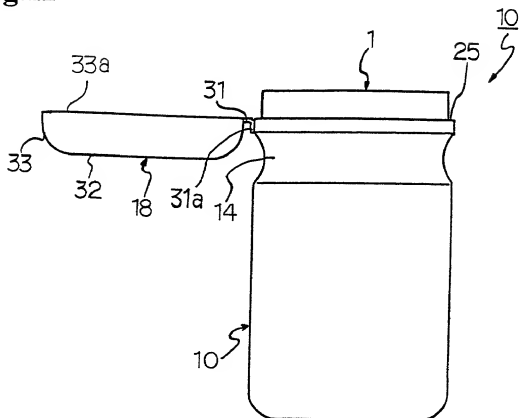

**Fig.13**

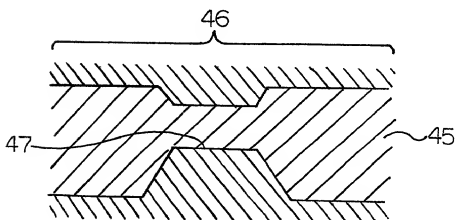

**Fig.14**

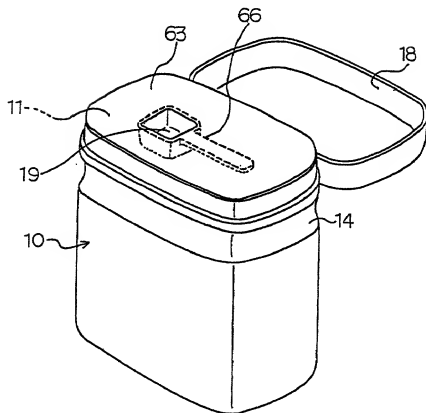

**Fig.15**

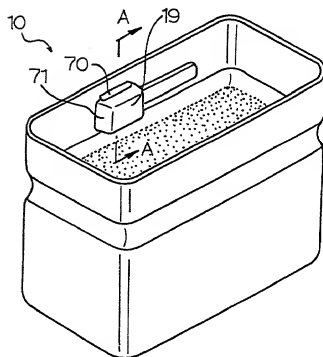


Fig.16







Fig.17

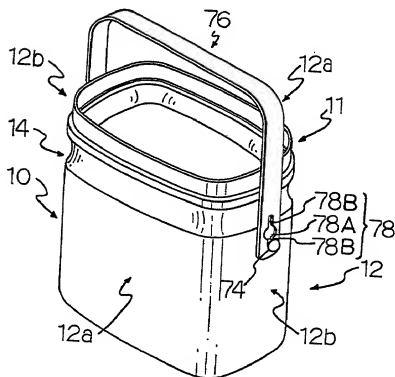

**Fig.18**




**Fig.19**

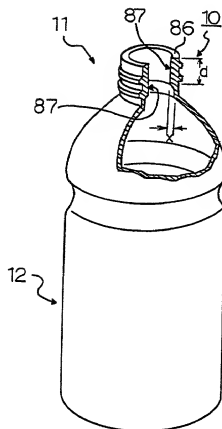



**Fig.20**

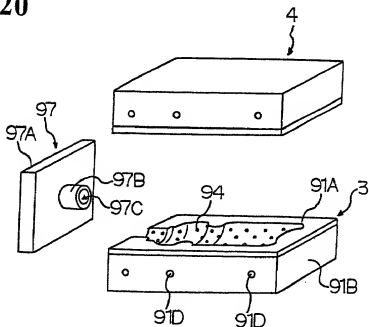

**Fig.21**

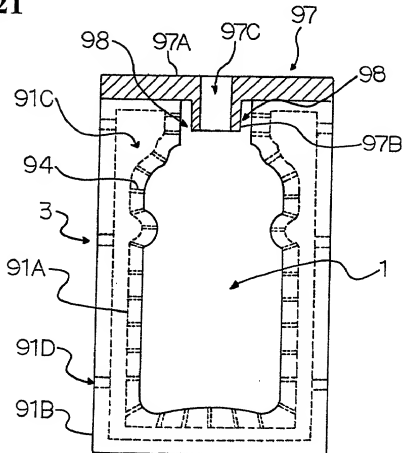


Fig. 22 (a)




Fig. 22 (b)




Fig. 23

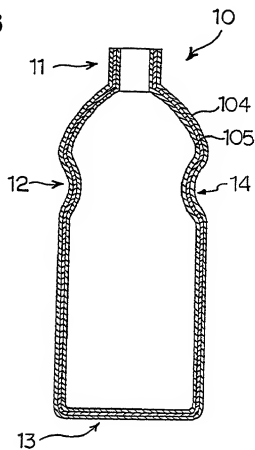


Fig. 24 (a)




Fig. 24 (b)




Fig. 24 (c)







Fig. 24 (d)




**Fig.25**



**Fig. 26 (a)**



**Fig. 26 (b)**



# Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

### Japanese Language Declaration

#### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

上記発明の明細書は、

本書に添付されています。

☐ \_\_\_\_月\_\_\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_\_に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

"MOLDED ARTICLE"

the specification of which

☐ is attached hereto.

☒ was filed on May 6, 1999

as United States Application Number or

PCT International Application Number

PCT/JP99/02367 and was amended on

October 1, 1999 (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

# Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一か国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)  
外国での先行出願

10-373713

Japan

(Number)

(Country)

(番号)

(国名)

\*See attached sheet

(Number)

(Country)

(番号)

(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。



(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願し、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed

優先権主張

☒ Yes ☐ No

はい いいえ

☐ Yes ☐ No

はい いいえ

28/December/1998

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Japanese Language Declaration

(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。  
(弁理士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavallee, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 35,379; Steven P. Weihrauch, Reg. No. 32,823; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surlinder Sachar, Reg. No. 34,423; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lyle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294, with full powers of substitution and revocation.

書類送付先

Send Correspondence to:

OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C.  
FOURTH FLOOR  
1755 JEFFERSON DAVIS HIGHWAY  
ARLINGTON, VIRGINIA 22202 U.S.A.

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

(703) 413-3000

単独発明者または第一の共同発明者の氏名

Full name of sole or first joint inventor:

Kenichi OTANI

発明者の署名

日付

Inventor's signature

Date

住所

Residence

国籍

Citizenship

郵便の宛先

Post Office Address

第二の共同発明者の氏名

Full name of second joint inventor, if any

Yoshiaki KUMAMOTO

第二の共同発明者の署名

日付

Second joint inventor's signature

Date

住所

Residence

国籍

Citizenship

郵便の宛先

Post Office Address

Research Laboratories, 2606, Akabane,  
Ichikai-machi, Haga-gun, TOCHIGI  
321-3426 JAPAN

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

## Japanese Language Declaration

(日本語宣言書)

第三の共同発明者の氏名	3rd	Full name of third joint inventor, if any <u>Koichi SAGARA</u>
第三の共同発明者の署名	日付	Third joint Inventor's signature <u>KOICHI SAGARA</u> Date <u>June 26, 2001</u>
住所		Residence <u>TOCHIGI, JAPAN</u> SPX
国籍		Citizenship <u>Japanese</u>
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

第四の共同発明者の氏名	4th	Full name of fourth joint inventor, if any <u>Shinji KODAMA</u>
第四の共同発明者の署名	日付	Fourth joint Inventor's signature <u>Shinji Kodama</u> Date <u>June 26, 2001</u>
住所		Residence <u>TOCHIGI, JAPAN</u> SPX
国籍		Citizenship <u>Japanese</u>
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

第五の共同発明者の氏名	5th	Full name of fifth joint inventor, if any <u>Minoru GOJO</u>
第五の共同発明者の署名	日付	Fifth joint Inventor's signature <u>Minoru Gojo</u> Date <u>June 27, 2001</u>
住所		Residence <u>TOCHIGI, JAPAN</u> SPX
国籍		Citizenship <u>Japanese</u>
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

第六の共同発明者の氏名	6th	Full name of sixth joint inventor, if any <u>Susumu FUJINAMI</u>
第六の共同発明者の署名	日付	Sixth joint Inventor's signature <u>Susumu Fujinami</u> Date <u>June 19, 2001</u>
住所		Residence <u>TOKYO, JAPAN</u> SPX
国籍		Citizenship <u>Japanese</u>
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2-1-3, Bunka, Sumida-ku, TOKYO 131-0044 JAPAN

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)



# Japanese Language Declaration

7-0 Full name of seventh joint inventor Tokuo TSUURA	
日付	Inventor's signature Tokuo Tsuura Date June 13, 2001
住所	Residence TOCHIGI, JAPAN SPX
国籍	Citizenship Japanese
郵便の宛先	Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

7-1 Full name of eighth joint inventor Shinji OTAKURA	
日付	Inventor's signature Shinji Otakura Date June 19, 2001
住所	Residence TOCHIGI, JAPAN SPX
国籍	Citizenship Japanese
郵便の宛先	Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

7-2 Full name of ninth joint inventor Takehiko TOJO	
日付	Inventor's signature Takehiko Tojo Date June 8, 2001
住所	Residence TOCHIGI, JAPAN SPX
国籍	Citizenship Japanese
郵便の宛先	Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

10-00 Full name of tenth joint inventor Yukiya SATO	
日付	Inventor's signature Yukiya Sato Date June 29, 2001
住所	Residence WAKAYAMA, JAPAN SPX
国籍	Citizenship Japanese
郵便の宛先	Post Office Address c/o Kao Corporation, Research Laboratories, 1334, Minato, Wakayama-shi, WAKAYAMA 640-8404 JAPAN

(第 1 1 またはそれ以降の共同発明者に対しても同様な  
情報および署名を提供すること。)

(Supply similar information and signature for eleventh and  
subsequent joint inventors.)

# Japanese Language Declaration

11-0		Full name of eleventh joint inventor Masataka ISHIKAWA	
日付		Inventor's signature MASATAKA ISHIKAWA	Date June 7, 2001
住所		Residence TOCHIGI, JAPAN	
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

12-0		Full name of twelfth joint inventor Shingo ODAJIMA	
日付		Inventor's signature Shingo Odaima	Date June 6, 2001
住所		Residence TOCHIGI, JAPAN	
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

13-0		Full name of thirteenth joint inventor Masanori TAKITA	
日付		Inventor's signature Masanori Takita	Date June 5, 2001
住所		Residence TOCHIGI, JAPAN	
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

		Full name of fourteenth joint inventor	
日付		Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	

Prior Foreign Applications (continued)

Number	Country	Filing Date	Priority Claimed
10-373717	Japan	28/Decémber/1998	Yes
10-373718	Japan	28/December/1998	Yes
10-374351	Japan	28/December/1998	Yes
10-374353	Japan	28/December/1998	Yes
11-21599	Japan	29/January/1999	Yes
11-29290	Japan	5/February/1999	Yes
10-125013	Japan	7/May/1998	No
10-284416	Japan	6/October/1998	No
10-323971	Japan	13/November/1998	No
10-371580	Japan	25/December/1998	No
10-373715	Japan	28/December/1998	No
11-95462	Japan	1/April/1999	No
11-104526	Japan	12/April/1999	No